PRICE CATALOGUE 2021-2022

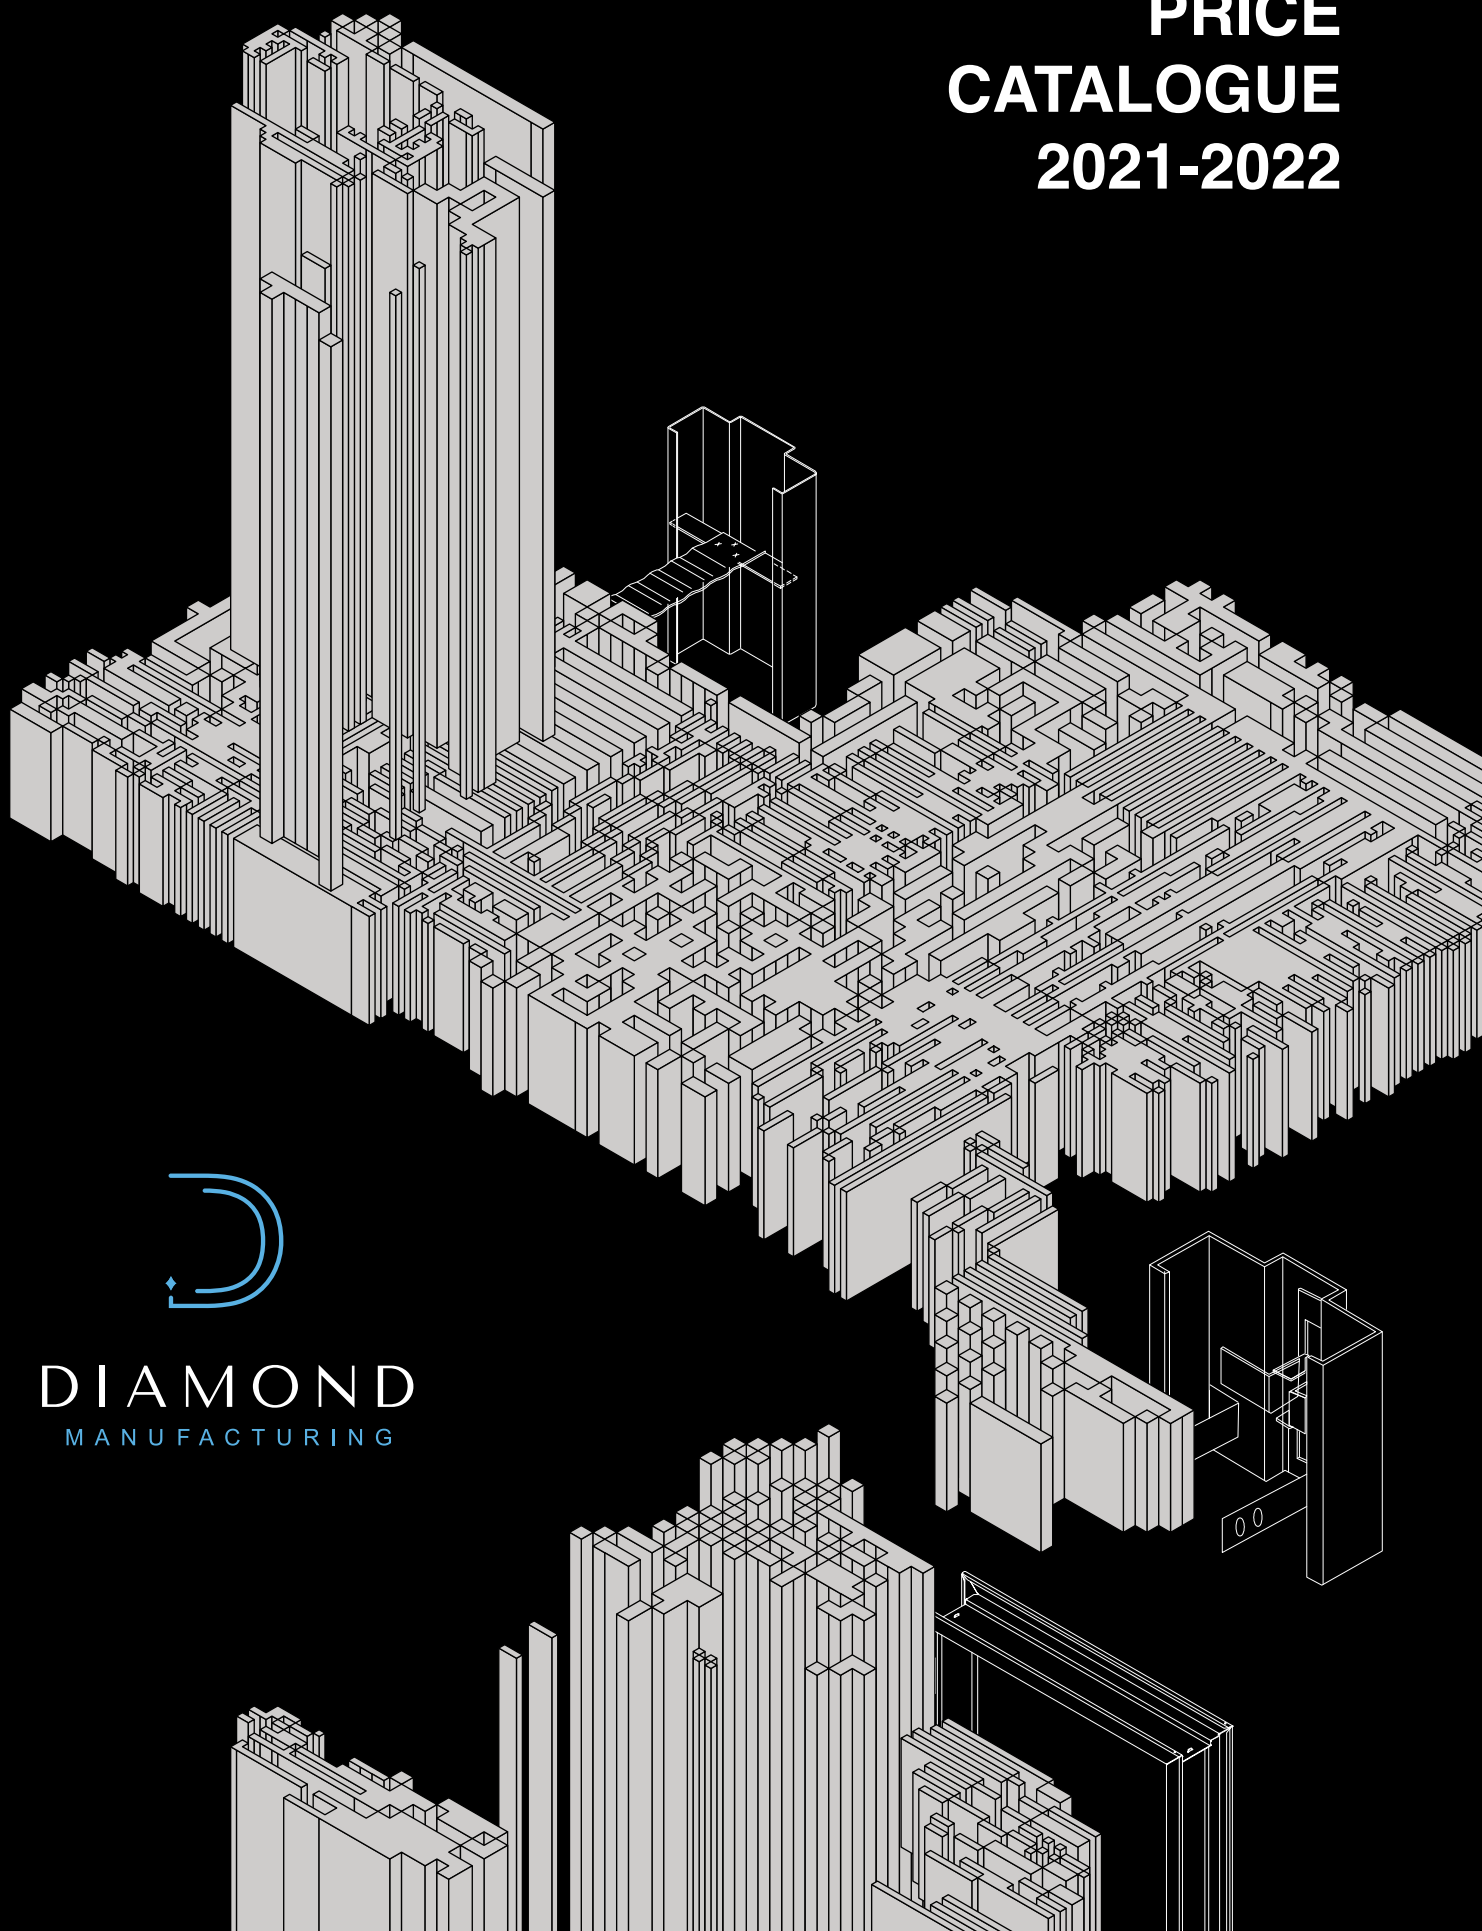

DIAMOND
MANUFACTURING

TABLE OF CONTENTS

- Estimates Lead Time . . . 3
- Customer Discount . . . 4
- Message of President . . . 5
- Return Policy . . . 6
- Terms and Conditions . . . 7
- How to order? . . . 8
- 16 (0.53) Gauge KD Standard frames for 1 ¾" Doors . . . 10
- 16 (0.53) Gauge DW Standard frames for 1 ¾" Doors . . . 11
- 16 (0.53) Gauge KD Engineered frames for 1 ¾" Doors . . . 12
- 16 (0.53) Gauge DW Engineered frames for 1 ¾" Doors . . . 13
- Custom Sidelite, Multi Opening and Transom Frames . . . 14
- Standard Sidelite, Multi Opening and Transom Frames . . . 15
- 4.1: Frame Options . . . 16
- 4.3 Closer Options . . . 16
- 4.4 Hinge Preps . . . 16
- 4.5 Strike Preps . . . 17
- 4.6 Preps . . . 17
- 4.7 Anchor Options . . . 18
- 4.8 Profile Options & Specialty Frames . . . 19
- 4.10 Welding Options . . . 20
- 4.11 Fire Labels / Tagging . . . 20
- 4.12 Stainless Steel Frames . . . 20
- 4.13 G90 Material . . . 21
- 4.14 Thermally Broken . . . 21
- 4.14 14 Gauge . . . 21

Estimates Lead Time

*All lead times are contingent on complete order information and begins when all signed off documents have been received by Diamond Fire Door.

Week:

Special Note: We have been experiencing delays in our operations for some time. Please be advised that the confirmed date on your acknowledgment may vary from 3 to 5 working days. Made sure to inform your receiving department and job site delivery.
Thank you for your cooperation.

We are now operating on regular business and summer hours:

Manufacturing – Shipping & Receiving	Mon – Thursday:	7:00 AM – 05:00 PM
Manufacturing – Shipping & Receiving	**Friday:**	**7:00 AM – 12:00 PM**
Office – Administrative, Project Management, Estimating		8:00 AM – 05:00 PM

* All dates listed below are estimated delivery weeks excluding transportation, holidays and factory closure.
The lead times may change without notice.
All dates listed below are estimated delivery weeks excluding transportation, holidays and factory closure The lead times may change without notice

Orders	**Weeks**	**Weeks of**
Standard Door up to 3'x7' with raw material in inventory including pre-machining code 30, 31, 31L, 32, 33, 34		
Fire Rated Agrifiber Core Door AF45-60 and Door PC5, 6000, 7000, 7600		
Fire Rated Mineral Core Door RMC45-60-90		
Lead-Lined Door (radiation shielding) price list		
Plastic Laminate Door: (Wilsonart, Formica, Arborite or Nevamar with standard finish price list)		
Sound Rated Door ''SR35''		
Sound Rated Door other than ''SR35''		

Additional Leadtime Options:	**Add working day(s)**
Machining other than code 30, 31, 31L, 32, 33, 34	
Raceway Preparation (if construction other than: AF45-60, PC5, 6000, 7000, 7600)	
Lite opening / Moulding	
Covered stiles VE, PE	
Factory clear varnish / Prime	
Factory stained and paint Baillargeon's color (Signed approval brochure is required)	
Factory custom stained color (Physical sample or signed approval brochure is required)	
Factory custom painted color (Physical sample or signed approval brochure is required)	

Quote confirmation time	Working days = 3 to 5 / Special Product: 4 to 6
Order confirmation time	Working days = 5 to 7 / Special Product: 8 to 10

Cancellation Policy: Cancellations made within 24hrs will be cancelled. Cancellations made after 24hrs of receipt of purchase order will be 50% processed. Any orders that have gone into manufacturing will be 100% processed. * All dates listed below are estimated delivery weeks excluding transportation, holidays and factory closure.

Customer Discount

Message of President

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum. Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum. Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum. Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum. Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

Return Policy

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum. Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum. Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum. Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum. Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

Terms and Conditions

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum. Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum. Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum. Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum. Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

How to order?

The ordering process for Diamond Manufacturing is an easy process 4 step process.

Step1: send all orders to orderdesk@diamondmfg.ca complete with shop drawings, detailed schedule showing jamb depths, throat sizes, profile types and hardware preps.

Step2: Order desk will provide you with a pick up date

Step3: Your order will start being processed by being assed and written up by our technical engineers.

Step4: Once the order is assed it will be sent off to our shop drawing department.

Step5: Once drawings are complete your write up and shop drawings for your project will be sent to you

Step6: After the drawings are signed off on we will then begin the manufacturing process.

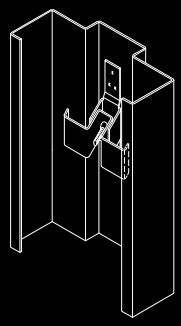

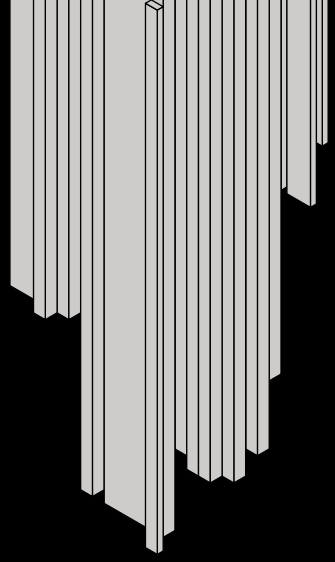

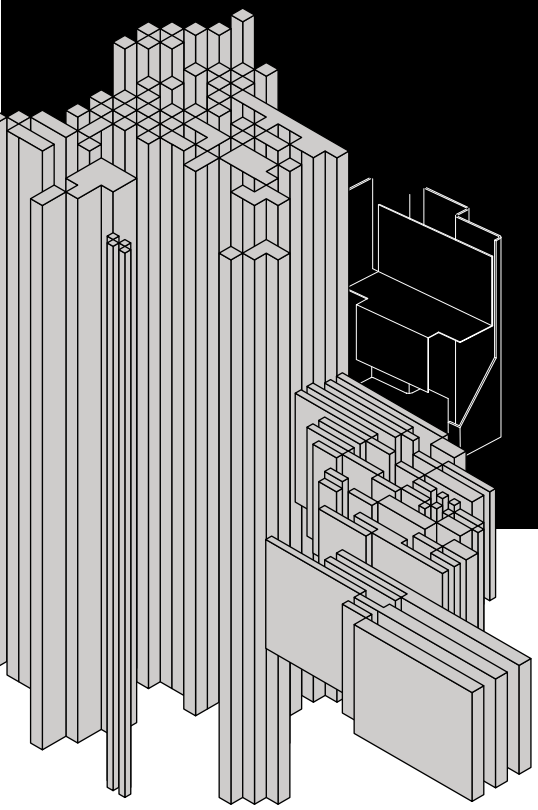

Section 1

Pricing

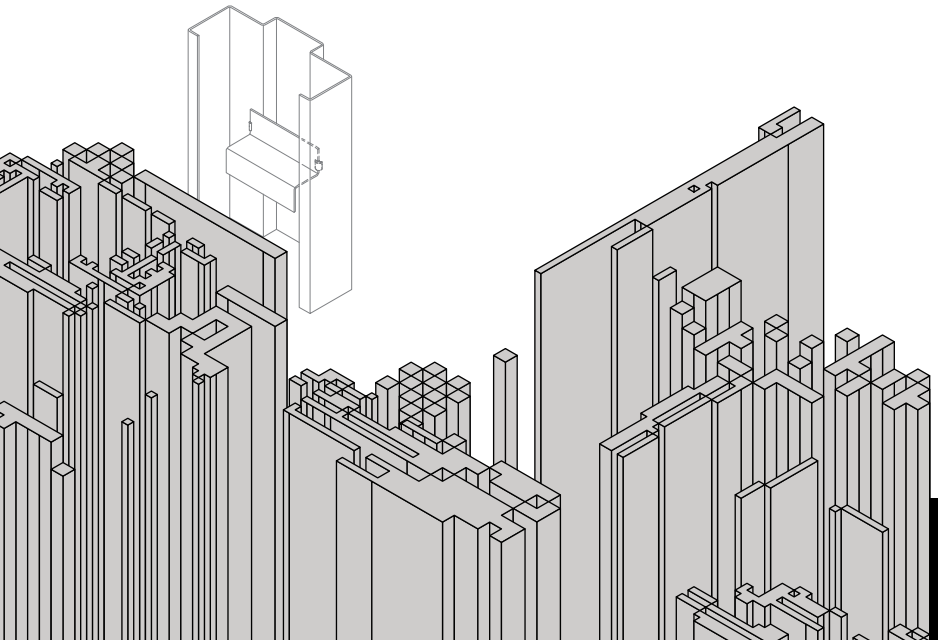

DIAMOND
MANUFACTURING

16 (0.53) Gauge KD Standard frames for 1 ¾” Doors

KD16 – JD **Single Return**

JAMB DEPTHS	4 ¾” JAMB DEPTH		5 ¾” JAMB DEPTH		6 ¾” JAMB DEPTH		7 ¾” JAMB DEPTH		8 ¾” JAMB DEPTH	
Rebate height	6’8” 7’0”	7’6” 8’0”	6’8” 7’0”	7’6” 8’0”	6’8” 7’0”	7’6” 8’0”	6’8” 7’0”	7’6” 8’0”	6’8” 7’0”	7’6” 8’0”
REBATE WIDTH SINGLE DOORS 2’0” 2’2” 2’4” 2’6” 2’8” 2’10” 3’0”	118.00	150.00	118.00	150.00	131.00	167.00	145.00	186.00	145.00	186.00
SINGLE DOORS 3’2” 3’4” 3’6” 3’8” 3’10” 4’0”	123.00	159.00	123.00	159.00	136.00	172.00	150.00	195.00	150.00	195.00
DOUBLE DOORS 4’0” 4’2” 4’4” 4’6” 4’8” 4’10” 5’0” 5’2” 5’4” 5’6” 5’8” 5’10” 6’0”	145.00	172.00	145.00	172.00	159.00	190.00	170.00	209.00	170.00	209.00
DOUBLE DOORS 6’2” 6’4” 6’6” 6’8” 6’10” 7’0” 7’2” 7’4” 7’6” 7’8” 7’10” 8’0”	150.00	181.00	150.00	181.00	168.00	204.00	177.00	222.00	177.00	222.00

Note: Any Throat sizes below 3 ½” will have to be Single Rebate

16 (0.53) Gauge DW Standard frames for 1 ¾" Doors

DWKD16 – JD **Double Return** DW3PC16 – JD **Double Return**

JAMB DEPTHS	3 1/2" – 4 7/8 THROAT		5" – 6 7/8" THROAT		7" – 9 1/8" THROAT		9 1/4" – 11 ¼" THROAT		11 ¼ + 25% TO HIGHEST JAMB DEPTH	
Rebate height	6'8" 7'0"	7'6" 8'0"	6'8" 7'0"	7'6" 8'0"	6'8" 7'0"	7'6" 8'0"	6'8" 7'0"	7'6" 8'0"	6'8" 7'0"	7'6" 8'0"
REBATE WIDTH SINGLE DOORS 2'0" 2'4" 2'6" 2'8" 2'10" 3'0"	123.00	152.00	135.00	168.00	145.00	181.00	159.00	195.00	11 ¼ + 25% TO HIGHEST JAMB DEPTH	
SINGLE DOORS 3'2" 3'4" 3'6" 3'8" 4'0"	123.00	159.00	123.00	159.00	136.00	172.00	150.00	195.00	11 ¼ + 25% TO HIGHEST JAMB DEPTH	
DOUBLE DOORS 4'0" 4'8" 5'0" 5'8" 6'0"	145.00	172.00	145.00	172.00	159.00	190.00	170.00	209.00	11 ¼ + 25% TO HIGHEST JAMB DEPTH	
DOUBLE DOORS 6'8" 7'0" 8'0"	150.00	181.00	150.00	181.00	168.00	204.00	177.00	222.00	11 ¼ + 25% TO HIGHEST JAMB DEPTH	

The above prices are for Diamond Standard Drywall Frames in the above sizes.
Frames listed above are prepped for a Standard ANSI A115.1 (ASA) or blank strike preparation
Standard profile DWKD or DW3PC Only
Loose anchors extra
Extra for the above: The following are the only extras available for the above standard frames
Label extra $24.00 per single or $32.00 for Double Frame (Includes standard closer reinforcement)
Deadlock Strike prep at 6" above ASA extra $32.00 per frame
Rim Panic or standard closer reinforcement $8.00 per frame each
Quantity discounts: (Cannot be combined with any other Quantity discounts)
A: 25-49 Frames with any of the above throats 10%
B: 50 – 100 Frames with any of the above throats 20%
C: Consult factory for larger Quantity

16 (0.53) Gauge KD Engineered frames for 1 ¾” Doors

KD16 – JD **Single Return**

JAMB DEPTHS	4 ½ - 5 7/8” JAMB DEPTH		6” – 7 7/8” JAMB DEPTH		8” – 9 1/8” JAMB DEPTH		9 ¼ - 12 ¼” JAMB DEPTH		12 ¼ + 25% TO HIGHEST JAMB DEPTH
Rebate height	6’8” 7’0”	7’6” 8’0”	6’8” 7’0”	7’6” 8’0”	6’8” 7’0”	7’6” 8’0”	6’8” 7’0”	7’6” 8’0”	
REBATE WIDTH SINGLE DOORS 2’0” 2’2” 2’4” 2’6” 2’8” 2’10” 3’0”	127.00	165.00	141.00	190.00	156.00	201.00	181.00	222.00	12 ¼ + 25% TO HIGHEST JAMB DEPTH
SINGLE DOORS 3’2” 3’4” 3’6” 3’8” 3’10” 4’0”	135.00	172.00	149.00	200.00	161.00	209.00	190.00	229.00	12 ¼ + 25% TO HIGHEST JAMB DEPTH
DOUBLE DOORS 4’0” 4’2” 4’4” 4’6” 4’8” 4’10” 5’0” 5’2” 5’4” 5’6” 5’8” 5’10” 6’0”	147.00	190.00	177.00	216.00	187.00	226.00	209.00	247.00	12 ¼ + 25% TO HIGHEST JAMB DEPTH
DOUBLE DOORS 6’2” 6’4” 6’6” 6’8” 6’10” 7’0” 7’2” 7’4” 7’6” 7’8” 7’10” 8’0”	157.00	200.00	187.00	227.00	198.00	236.00	219.00	259.00	12 ¼ + 25% TO HIGHEST JAMB DEPTH

Note: Any Throat sizes below 3 ½” will have to be Single Rebate

16 (0.53) Gauge DW Engineered frames for 1 ¾" Doors

DWKD16 – JD **Double Return** DW3PC16 – JD **Double Return**

JAMB DEPTHS	3 ½ - 4 7/8" THROAT		5" - 6 7/8" THROAT		7" – 9 1/8" THROAT		9 ¼" - 11 ¼" THROAT		11 ¼ + 25% TO HIGHEST
Rebate height	6'8" 7'0"	7'6" 8'0"	6'8" 7'0"	7'6" 8'0"	6'8" 7'0"	7'6" 8'0"	6'8" 7'0"	7'6" 8'0"	
REBATE WIDTH SINGLE DOORS 2'0" 2'2" 2'4" 2'6" 2'8" 2'10" 3'0"	136.00	174.00	150.00	191.00	163.00	210.00	192.00	230.00	11 ¼ + 25% TO HIGHEST THROAT
SINGLE DOORS 3'2" 3'4" 3'6" 3'8" 3'10" 4'0"	143.00	181.00	158.00	199.00	170.00	218.00	200.00	240.00	11 ¼ + 25% TO HIGHEST THROAT
DOUBLE DOORS 4'0" 4'2" 4'4" 4'6" 4'8" 4'10" 5'0" 5'2" 5'4" 5'6" 5'8" 5'10" 6'0"	157.00	200.00	185.00	227.00	197.00	236.00	218.00	260.00	11 ¼ + 25% TO HIGHEST THROAT
DOUBLE DOORS 6'2" 6'4" 6'6" 6'8" 6'10" 7'0" 7'2" 7'4" 7'6" 7'8" 7'10" 8'0"	167.00	210.00	196.00	237.00	203.00	247.00	228.00	270.00	11 ¼ + 25% TO HIGHEST THROAT

Note: Any Throat sizes below 3 ½" will have to be Single Rebate

Custom Sidelite, Multi Opening and Transom Frames

PRICE IS BASED ON PER FOOT

SECTION	PROFILE	4 ½" – 5 7/8" JAMB DEPTH	6" – 7 7/8" JAMB DEPTH	8" – 9 1/8" JAMB DEPTH	9 ¼" – 12 1/4" JAMB DEPTH	12 ¼" + JAMB DEPTHS +25%
2" Section		$8.50	$9.50	$10.00	$13.50	+25% To highest Jamb depth
2" Mullion		$20.00	$22.50	$25.50	$34.50	+25% To highest Jamb depth
2" Cased Open		$8.50	$9.50	$10.00	$13.50	+25% To highest Jamb depth
4" Section		$14.50	$15.50	$17.50	$19.00	+25% To highest Jamb depth
2 1/8" - 12" Section Mid Rail		$34.50	$36.50	$37.00	$40.00	+25% To highest Jamb depth
4 1/8" – 12" Section Sill		$26.50	$27.00	$28.00	$30.00	+25% To highest Jamb depth
Cover Plate		$8.50	$9.50	$10.00	$13.50	+25% To highest Jamb depth
2 Way Corner Post		$38.00	$40.00	$41.00	$44.00	+25% To highest Jamb depth
3 Way Corner Post		$46.00	$48.00	$49.00	$52.00	+25% To highest Jamb depth
WELDING & NOTCHING						
PRICE PER FACEWELD	$40.00	$40.00	$80.00			
PRICE PER NOTCH FOR WELDING BY OTHERS	$8.00	$8.00	$16.00			

Add for each door opening – Single $32.00 – Double $48.00 – Multi-Opening $32.00
Add for DW -4 Piece Windows $64.00 per window (Includes Drywall Returns)
Add for WHI Fire Label for sidelites, Multi-openings & Transom frames - $40.00 (Subject to limitations)
Add Field Splices $80.00 Per unit separation (Ex. Screen 2" head x 2" Mullion x 4" Sill = $80 List)
Add Glazing bead installed on both sides add – $1.15 per foot
Glazing bead included on 1 7/8 Rebate when factory welded.
Add for drywall returns $32.00 per item
Consult Factory for Full profile weld screens
CONSULT FACTORY FOR CUSTOM FACE OR OTHER OPTIONS FOR AVAILABILITY AND PRICING NOT SHOWN ABOVE*

Standard Sidelite, Multi Opening and Transom Frames

PRICE IS BASED ON PER FOOT

SECTION	PROFILE	4 ¾" – 5 ¾" – 5 7/8" JAMB DEPTH	6 ¾" JAMB DEPTH	7 ¾" JAMB DEPTH	8 ¾"" JAMB DEPTH	12 ¼" + JAMB DEPTHS +25%
2" Section		$7.00	$8.50	$8.75	$10.00	+25% To highest Jamb depth
2" Mullion		$17.00	$19.00	$20.50	$22.50	+25% To highest Jamb depth
2" Cased Open		$7.00	$8.50	$8.75	$10.00	+25% To highest Jamb depth
4" Section		$11.50	$12.50	$14.50	$15.50	+25% To highest Jamb depth
2 1/8" - 12" Section Mid Rail		$31.00	$32.50	$34.50	$36.00	+25% To highest Jamb depth
4 1/8" – 12" Section Sill		$23.50	$24.50	$26.50	$28.00	+25% To highest Jamb depth
Cover Plate		$7.00	$8.50	$8.75	$10.00	+25% To highest Jamb depth
2 Way Corner Post		$34.50	$36.50	$37.50	$40.50	+25% To highest Jamb depth
3 Way Corner Post		$42.50	$44.50	$45.50	$48.50	+25% To highest Jamb depth
WELDING & NOTCHING						
PRICE PER FACEWELD	$40.00	$40.00	$80.00			
PRICE PER NOTCH FOR WELDING BY OTHERS	$8.00	$8.00	$16.00			

Add for each door opening – Single $32.00 – Double $48.00 – Multi-Opening $32.00
Add for DW -4 Piece Windows $64.00 per window (Includes Drywall Returns)
Add for WHI Fire Label for sidelites, Multi-openings & Transom frames - $40.00 (Subject to limitations)
Add Field Splices $80.00 Per unit separation (Ex. Screen 2" head x 2" Mullion x 4" Sill = $80 List)
Add Glazing bead installed on both sides add – $1.15 per foot
Glazing bead included on 1 7/8 Rebate when factory welded.
Add for drywall returns $32.00 per item
Consult Factory for Full profile weld screens
CONSULT FACTORY FOR CUSTOM FACE OR OTHER OPTIONS FOR AVAILABILITY AND PRICING NOT SHOWN ABOVE*

4.1: Frame Options

	Description	Price
Frame Width: (non-standard)	Under 3'0	$16.00
	Over 8'0 to 10'0 Double	$32.00
	Over 4'0 to 5'0 Single	$25.00
Frame Height: (non-standard)	7'0 and under. Add to 7'0 Frame	$16.00
	Over 7'0 to 8'0. Add to 8'0 Frame	$16.00
	Over 8'0 to 9'0. Add to 8'0 Frame	$40.00
	Over 9'0 to 10'0. Add to 8'0 Frame	$72.00
	Over 10'0 to 12'0. Add to 8'0 Frame	$150.00
Non standard face frame	1 1/4" - 1 7/8" Face	$80.00
	2 1/8" - 4" Face	$96.00

4.3 Closer Options

Description	Price
Regular or Parallel Arm Closer Reinforcing (Per reinforcement)	$8.00
ADO Full reinforcement on header face (Specify push or pull)	$32.00
Coordinator Reinforcing	$32.00
Concealed Closer preparation C/W 14GA Reinforcement (drilling/tapping by others)	$160.00
Concealed Holder Cut-Out and Reinforcing (drilling / tapping by others)	$80.00
Mag Lock Reinforcing	$12.00

4.4 Hinge Preps

Description	Price
Non-Standard Hinge Location (N/C with 10 jambs or more)	$16.00
Frames over 7'6" add for 2 pair butts	$16.00
3 1/2" Templated Hinge Prep	$48.00
4" Templated Hinge Prep	$48.00
"C Pattern #12/24 screw - *Zig-Zag Pattern #10/24 screw	
7" Templated Hinge Prep (special order part - Reinforcement only. drilling/tapping by others)	$60.00
5" Templated Hinge Prep (per jamb)	$40.00
4 1/2" or 5" Heavy Weight Hinge Prep (per jamb)	$16.00
Surface Mounted Hinge Prep Reinforcement Only (Full Height)	$40.00
Additional Hinge Prep (4-1/2" or 5" only)	$16.00
Top Anchor Hinge Prep (reinforcement only. drilling/tapping by others)	$14.30
Pivot Hinge Preparations & SOSS hinge prep (each prep) (reinforcement only. drilling/tapping by others)	$160.00
Anchor hinge preparation (To welded frame)	$320.00

4.5 Strike Preps

Description	Price
ASA Strike Prep at Non Standard Location	$16.00
Deadlock Strike Prep No Lip (2 3/4” x 1 1/8”, 5” To 10” O.C.)(40+ - 50%)	$32.00
Mortise Deadlock Strike Prep C/W 9" Box	$50.00
Surface Strike Reinforcement Only	$8.00
Double Lip Strike Reinforcement/Cut Out - C/W custom box	$80.00
T-Strike Prep	$32.00
Flushbolt Strike In Head	$40.00
Reversible Flush Bolt Prep	$50.00
Surface Vertical Rod Reinf (Each Prep)	$8.00
Mortised Vertical Rod Preps C/W 15" Box (Each prep)	$45.00
Additional ASA Strike Prep	$16.00
Emergency Stop - C/W custom box	$80.00

4.6 Preps

Description	Price
Electric Power Transfer (EPT) Prep C/W Box	$80.00
Electric Hinge Prep C/W Box	$40.00
Electric Strike Prep C/W Box	$80.00
Electric Strike Prep (Other than templated ASA) C/W Box	$160.00
Security Contact Prep Hole Only	$40.00
Security Contact Prep With Box	$56.00
Conduit to be run inside frame - connected on boxes required	$60.00
Access cut out 1 1/8" x 8" C/W Box	$92.00
Adding of 30" electrical box	$83.00

4.7 Anchor Options

Description	Price
All anchors requiring bolts will have to be specified when ordering	
Existing Masonry Anchors (EMA) Welded In (per frame up to 7'-0") (Includes 3/8" Diameter Counter Sunk Hole and Butterfly Anchor) (3/8" Lag Bolt Not Included)	$60.00
Existing Masonry Anchors (EMA) Welded In (per frame up to 8'-0") (Includes 3/8" Diameter Counter Sunk Hole and Butterfly Anchor) (3/8" Lag Bolt Not Included)	$80.00
3/8" x 5" Steel Lag Bolts (6 Bolts)	$50.00
3/8 x 5" Steel Lag Bolts (8 Bolts)	$67.00
Z-Clips Welded In (Per Frame Up To 7'-0")	$20.00
Z-Clips Welded In (Per Frame Up To 8'-0")	$24.00
Masonry Wire Anchors (per frame up to 7'0)	$12.00
Masonry Wire Anchors (per frame up to 8'0)	$16.00
Stud Anchors (per frame up to 7'0)	$12.00
Stud Anchors (Engineered Frames) (per frame up to 7'0)	$20.00
Drywall Strap Anchors Welded In (Per Frame Up To 7'-0")	$9.25
Drywall Strap Anchors Welded In (Per Frame Up To 8'-0")	$16.50
Tube & Strap (Existing Masonry Anchors (EMA) Welded In (per frame up to 7'-0")	$70.00
Plug & Strap (Standard is 7/8 plug complete with strap) **Used for cased open frames**	$70.00
CUSTOM ANCHORS CAN BE MADE UPON REQUEST CONSULT FACTORY FOR PRICING	N/A

4.8 Profile Options & Specialty Frames

Description	Price
Double Egress Frame (Non-Labelled) - Available in 16Ga or 14Ga only (Minimum Jamb Depth = 5 1/2" to 12 3/4" Max) Add to Base price for double frame	$195.00
Double Egress Frame (Labeled) - Available in 16Ga or 14Ga only (Minimum Jamb Depth = 5 1/2" to 12 3/4" Max) Add to Base price for double frame	$275.00
Single Rabbeted Frame (Minimum Jamb Depth = 4")	$32.00
Contra Swing Frame (Includes Mullion) (Per frame Up to 8'-0") (Non-Labelled) - Frame same swing c/w mullion in center	$125.00
Communicating Frame (Per Frame Up to 8'-0") - Specify Swing (Doors of equal thickness 2 @ 1 3/4")	$64.00
Dutch Door Frame Labeled (Per frame Up to 7'-0") (Includes Extra Hinge Prep and ASA Strike at Dutch Door Location)	$224.00
Dutch Door Frame Non-Labelled (Per frame Up to 8'0") (Includes Extra Hinge Prep and ASA Strike at Dutch Door Location)	$64.00
Double Acting Frame (Per Frame Up to 8'-0") **SINGLE** (Continuously Reinforced for Surface Mounted Double Acting Hinges) reinforcement only. drilling/tapping by others	$40.00
Double Acting Frame (Per Frame Up to 8'-0") **DOUBLE** (Continuously Reinforced for Surface Mounted Double Acting Hinges) reinforcement only. drilling/tapping by others	$80.00
Lead Lined Frame (Labeled) - Available in 16Ga or 14Ga only - 4'0" x 7'2" (Minimum Jamb Depth = 5 1/2" to 12 3/4" Max) Add to Base price for single frame - 1/16" Half Lead Frame for Full lead X2 list + Custom Anchors	$800.00
Lead Lined Frame (Labeled) - Available in 16Ga or 14Ga only - 8'0" x 7'2" (Minimum Jamb Depth = 5 1/2" to 12 3/4" Max) Add to Base price for double frame - 1/16" Half Lead Frame for Full lead X2 list + Custom Anchors	$1,000.00
CBO Flushfit Frame (Wood Casing by Others)	$25.00
Equal Rabbet (Other than Standard 1 7/8"/1 1/2")	$64.00
Pocket Frame - No track or hardware included (Per Frame)	$320.00
Hospital Profile (Sanitary Profile - Angled on one side of sofit / Per Frame)	$160.00
Sanitary Base (Sanitary Base-Terminated Stops @ 6" Above Floor / Per Frame)	$160.00
Removable Mullion (Fire Rated or Standard) (Mullion is Notched and Comes With Kit) (Up to 7'-0" in Height and Up To 8-3/4" Jamb Depth)	$250.00
Frame rebated for 2" – 2 3/8"	$80.00
1 3/8" door frame (prep for 1 Pair of 3 1/2" template butts @ 2 3/4" strike	$80.00
Double Access Frame (Non-Labelled)	$195.00
Double Access Frame (Labeled)	$275.00
Access Frame - 4 sided welded frame	$80.00
Shadow Line Profile - Single return (Per foot - 3'0 x 7'0 frame = 17'0 x $5.56 = $96.05 - Discount = Cost)	$5.65

4.10 Welding Options

Description	Price
K.D. Frame Full Face Weld (1 1/4" face to 2" face frame) (Includes 2 Spreader Bars For Shipping Purposes Only)	$32.00
K.D. Frame Full Face Weld (2" face to 4" face frame) (Includes 2 Spreader Bars For Shipping Purposes Only)	$40.00
K.D. Thermally Broken Frame Full Face Weld	$40.00
Caulking in header of frames	$10.00
K.D. Frame Full Perimeter Weld	$45.00

4.11 Fire Labels / Tagging

Description	Price
Fire Label Factory Installed (WHI Label) - 3/4" Hour - 1 1/2" Hour - 3 Hour (Closer reinforcement required)	$16.00
Tagging (Per Tag)	$2.00
Jamb Pack Bundle (2 Jambs Bundled Together)	$2.00

4.12 Stainless Steel Frames

Description	Price
Stainless frame. #304 #4 finish - Up to 4'0 x 8'0 Single	$1,500.00
Stainless frame. #304 #4 finish - Up to 8'0 x 8'0 Double	$2,000.00
1 1/2 hour label - WHI	$160.00
3 hour label - WHI	$160.00
Welding of two joints (Per frame)	$480.00
All special preps..parts & cut outs (Regular add-on X6)	X6
Crating of welded frames (5 Maximum)	$240.00
Crating of K.D frames (25 Maximum)	$320.00
Stainless Steel #316 #4 Finish - Add 25% to frame cost	25%

4.13 G90 Material

Description	Price
.90 OUNCES PER SQUARE FT OF ZINC COATING - 30% TO FRAME COST (16GA & 14GA)	30%

4.14 Thermally Broken

Description	Price
THERMALLY BROKEN FRAMES - 125% TO FRAME COST (16GA & 14GA)	125%

4.14 14 Gauge

Description	Price
14 GAUGE FRAMES - 25% TO FRAME COST (14GA)	25%

Note that for pricing Screens / Sidelights - price is based on per linear foot - In cases where linear foot is for example, 20'-4", round up to nearest foot, 21'-0" for pricing
Note that for welded screens / sidelights from Diamond production, Diamond requires frame elevation, labeled for manufacture.

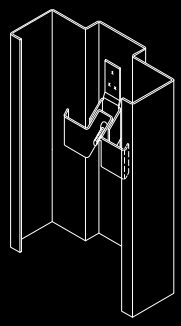

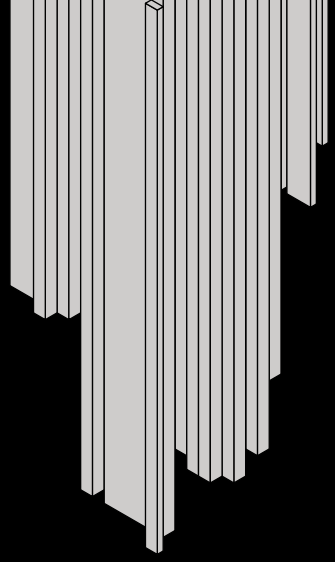

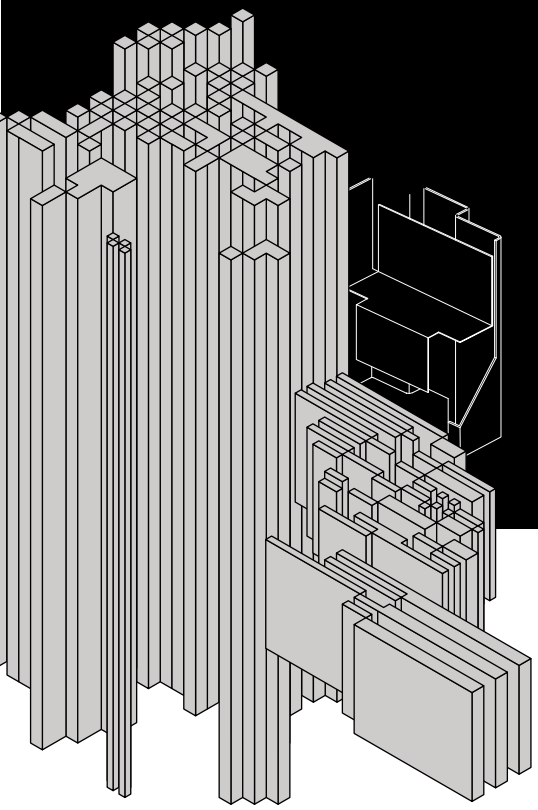

Section 2

Technical Illustrations

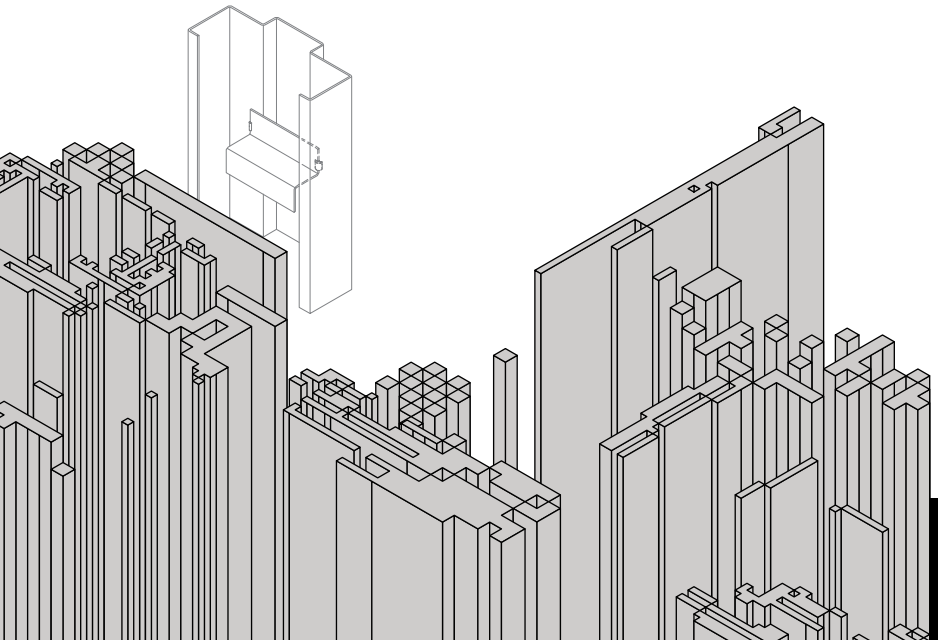

DIAMOND
MANUFACTURING

2021-2022 PRICE LIST

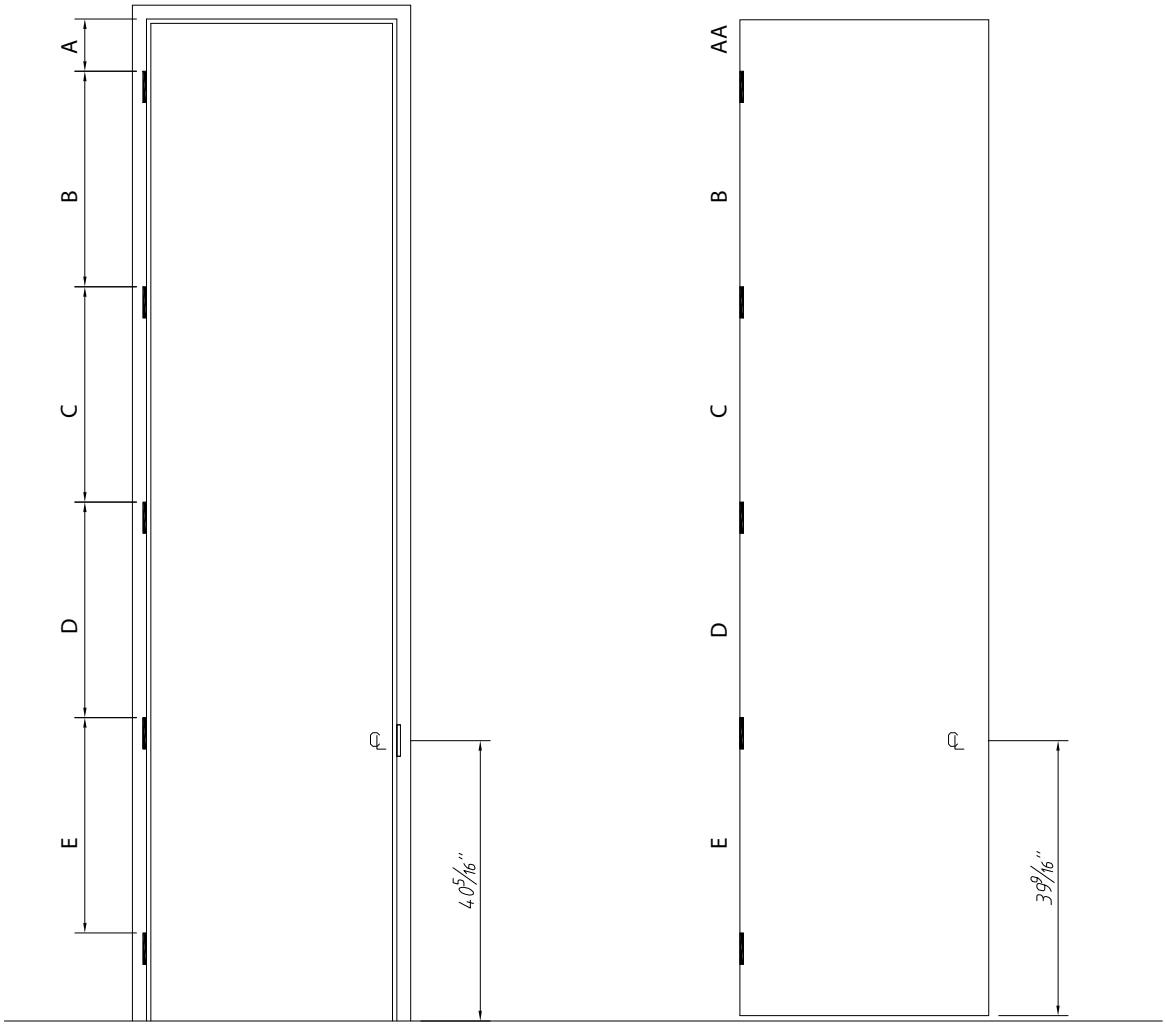

*REFER TO HINGE SPACING CHART

PROJECT:

LH SWING KEY RH

NOTES:
ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16"
(± 2) TOLERANCE.

DIMENSIONS SHOWN IN ( ) ARE IN MM.

DIAMOND MANUFACTURING

TITLE

HINGE & STRIKE DIMENSIONS

REV | DRAWING NO.

DRAWN BY: A.I. | DATE: 04/19/2021 | SCALE: NTS

DETAIL SHEET FOR PRESSED STEEL FRAMES

HOSPITAL PROFILE

HOSPITAL STOPS

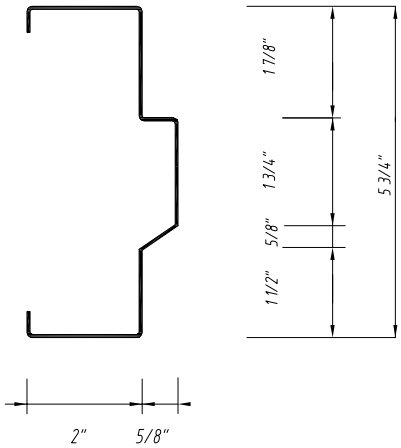

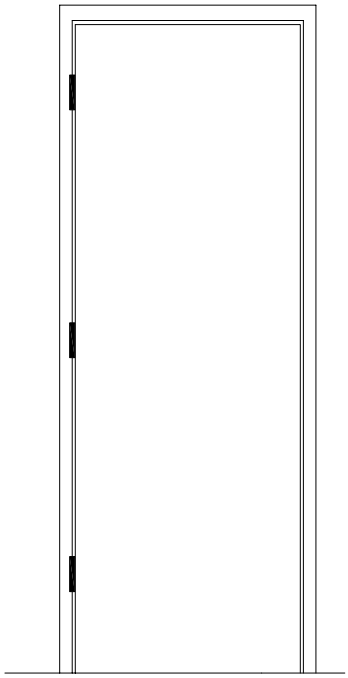

FRAME ELEVATION

PROJECT:

LH SWING KEY RH

NOTES:
ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16"
(± 2) TOLERANCE.

DIMENSIONS SHOWN IN ( ) ARE IN MM.

DIAMOND MANUFACTURING

TITLE

DOUBLE RABBET (HEAD OR JAMB DETAIL)

REV		DRAWING NO.	
DRAWN BY: A.I.	DATE: 04/19/2021	SCALE: NTS	

Mullion floor anchors are used to secure mullions which terminate at the floor. These anchors are manufactured from 12 gage galvanneal steel and are provided with 2 holes through which they are ram set or bolted to the floor.

There are 5 standard sizes to suit 4-3/4", 5-3/4", 6-3/4", 7-3/4" and 8-3/4" standard jamb depth, 2" face mullions. Non-standard sizes are also available.

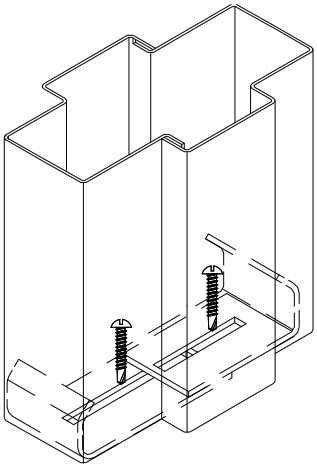

PROJECT:

LH SWING KEY RH

NOTES:
ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16" (± 2) TOLERANCE.

DIMENSIONS SHOWN IN ( ) ARE IN MM.

DIAMOND MANUFACTURING

TITLE

MULLION FLOOR ANCHORS

REV		DRAWING NO.	
DRAWN BY: A.I.	DATE: 04/19/2021	SCALE: NTS	

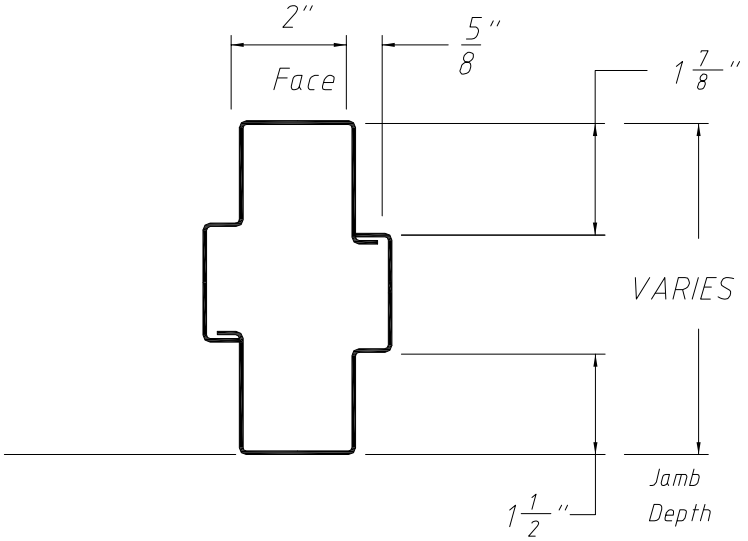

Notes:
Material: to 16 gauge steel is typical

PROJECT:

LH SWING KEY RH

NOTES:
ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16"
(± 2) TOLERANCE.

DIMENSIONS SHOWN IN ( ) ARE IN MM.

DIAMOND MANUFACTURING

TITLE
EQUAL MULLION SECTION

REV		DRAWING NO.	
DRAWN BY: A.I.	DATE: 04/19/2021	SCALE: NTS	

Mullions and center rails also come in standard and optional profiles. A standard double rabbet mullion (shown below) For center rails, both single and double rabbet profiles are available.

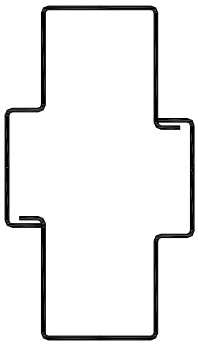

typical double rabbet mullion.



typical single rabbet mullion.

PROJECT:

LH SWING KEY RH

NOTES:
ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16" (± 2) TOLERANCE.

DIMENSIONS SHOWN IN ( ) ARE IN MM.

DIAMOND MANUFACTURING

TITLE
TYPICAL DOUBLE RABBET MULLION SECTION

REV DRAWING NO.

DRAWN BY: A.I. DATE: 04/19/2021 SCALE: NTS

THERMALLY BROKEN MATERIAL

HEADS & JAMBS

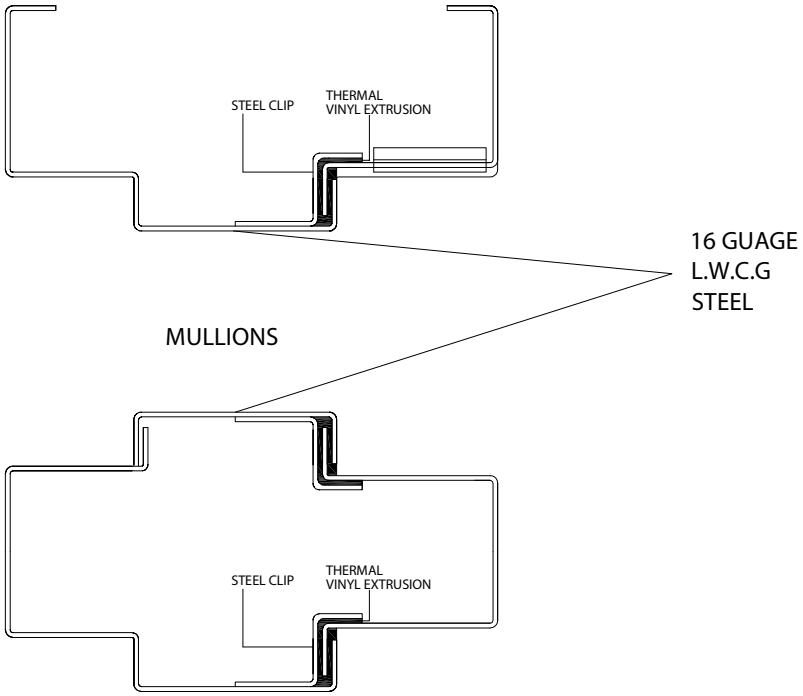

Notes:

16 GAUGE GALVANNEAL STEEL ONLY.

P.V.C THERMAL BRAKE MATERIAL.

HINGE JAMBS REINFORCED FOR 1 1/2" PAIR OF 4 1/2" HIGH TEMPLATE BUTTS

STRIKE JAMB REINFORCED FOR STANDARD ASA (1 1/4" X 4 7/8") STRIKE PLATE.

NO RUBBER SILENCERS HOLES ON STRIKE JAMB

PROJECT:		LH SWING KEY RH
DIAMOND MANUFACTURING	TITLE THERMALLY BROKEN MATERIAL	NOTES: ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16" (± 2) TOLERANCE. DIMENSIONS SHOWN IN ( ) ARE IN MM.
	REV	DRAWING NO.
	DRAWN BY: A.I. DATE: 04/19/2021	SCALE: NTS

Because the doors in double egress frames are centered on the jamb depth, the door rabbet is 2" instead of 1-7/8" and the soffit and reveal rabbets on the hinge jambs are equal.

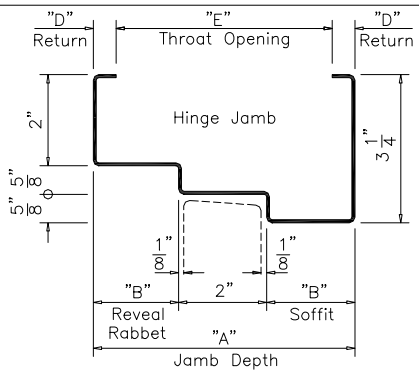

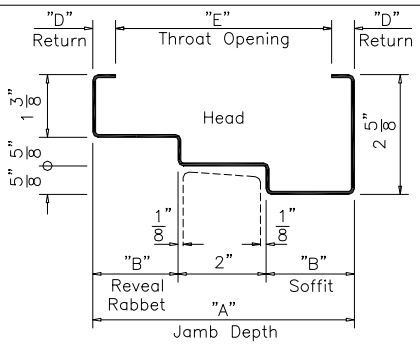

"A" Jamb Depth	"B" Reveal Rabbet and Soffit	"C" Head Door Rabbet	"D" Return	"E" Throat
4 3/4"	1 3/8"	2"	1/2"	3 3/4"
5 3/4"	1 7/8"	2"	7/16"	4 7/8"
6 3/4"	2 3/8"	2"	1/2"	5 3/4"
7 3/4"	2 7/8"	2"	1/2"	6 3/4"
8 3/4"	3 3/8"	2"	1/2"	7 3/4"

Standard Frame Rabbet Sizes	
Heights	Widths
6'8" (80")	4'0" (48")
	4'8" (56")
	5'0" (60")
7'0" (84")	5'4" (64")
	6'0" (72")
7'2" (86")	6'4" (76")
	6'8" (80")
8'0" (96")	7'0" (84")
	7'4" (88")
	8'0" (96")

PROJECT:

LH SWING KEY RH

NOTES:
ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16" (± 2) TOLERANCE.

DIMENSIONS SHOWN IN ( ) ARE IN MM.

DIAMOND MANUFACTURING

TITLE
STANDARD DOUBLE EGRESS SERIES
PROFILES AND SIZES

REV | DRAWING NO.

DRAWN BY: A.I. | DATE: 04/19/2021 | SCALE: NTS

DETAIL SHEET FOR PRESSED STEEL FRAMES

SANITARY BASE DETAIL

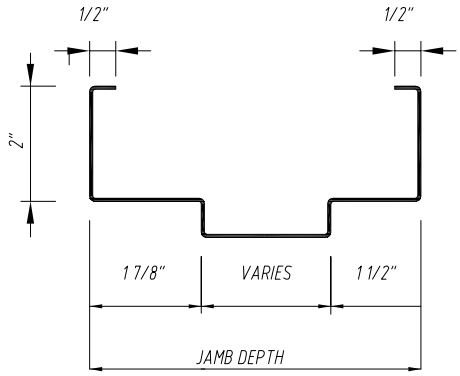

6" SANITARY BASE

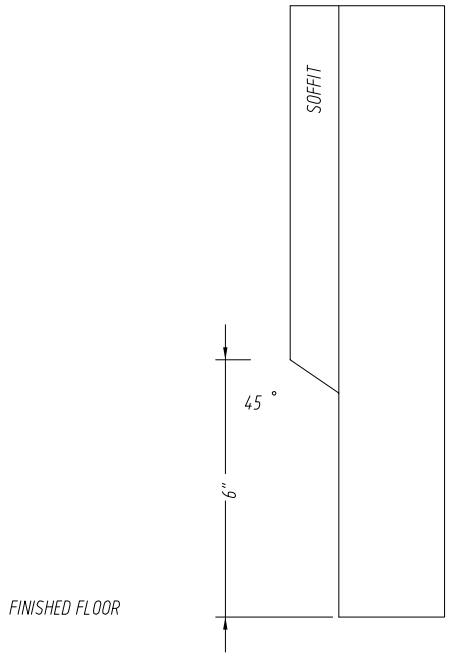

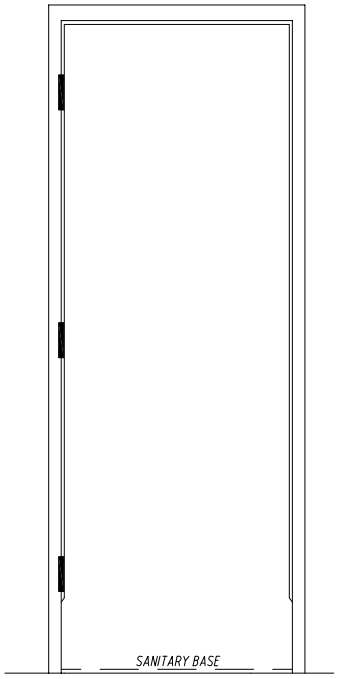

PROJECT:

LH SWING KEY RH

NOTES:
ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16" (± 2) TOLERANCE.

DIMENSIONS SHOWN IN ( ) ARE IN MM.

DIAMOND MANUFACTURING

TITLE

SANITARY BASE DETAIL

REV

DRAWING NO.

DRAWN BY: A.I. DATE: 04/19/2021 SCALE: NTS

Transom, sidelight and window frames are built with open sections (jambs, head and sills) at the perimeter and "closed sections", creating the individual door and/or glass openings required.

There are a number of closed sections available which include mullions, center rails and corner posts. Below shows the general profile details for each of these components.

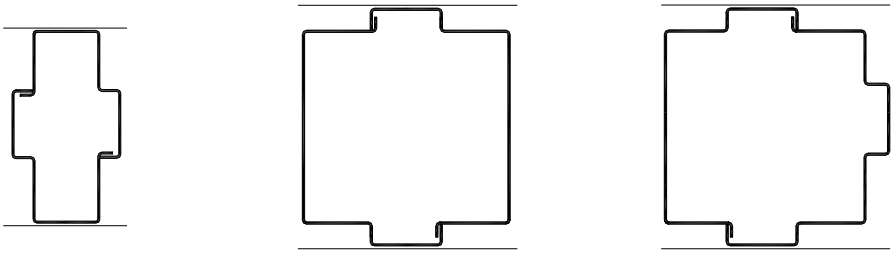

Mullion | Center Rail | Corner Post

Figure 12 : Closed Sections

Figure 13 shows various open and closed sections assembled into a finished sidelight frame.

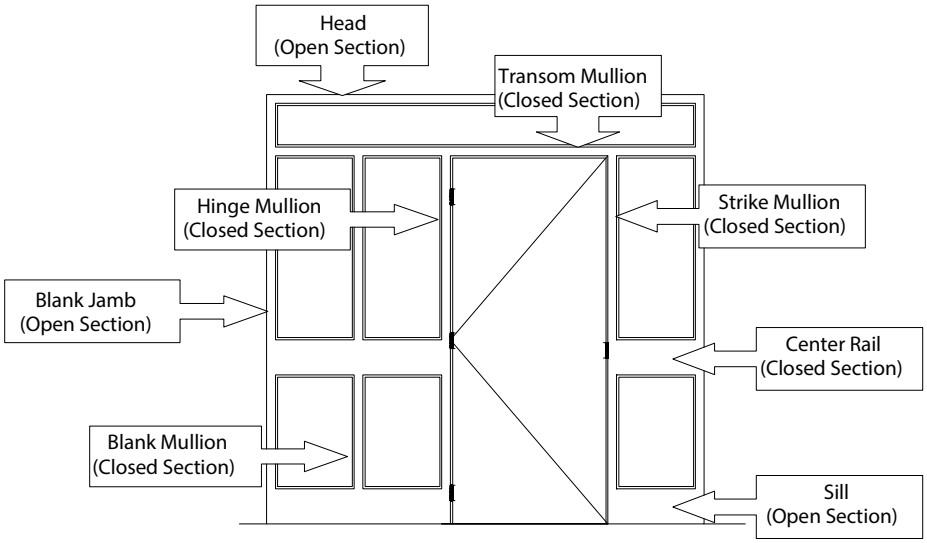

Figure 13 : Typical Sidelight Frame Components

PROJECT:

LH SWING KEY RH

NOTES:
ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16" (± 2) TOLERANCE.

DIMENSIONS SHOWN IN ( ) ARE IN MM.

DIAMOND MANUFACTURING

TITLE
MULLION SECTION

REV | DRAWING NO.

DRAWN BY: A.I. | DATE: 04/19/2021 | SCALE: NTS

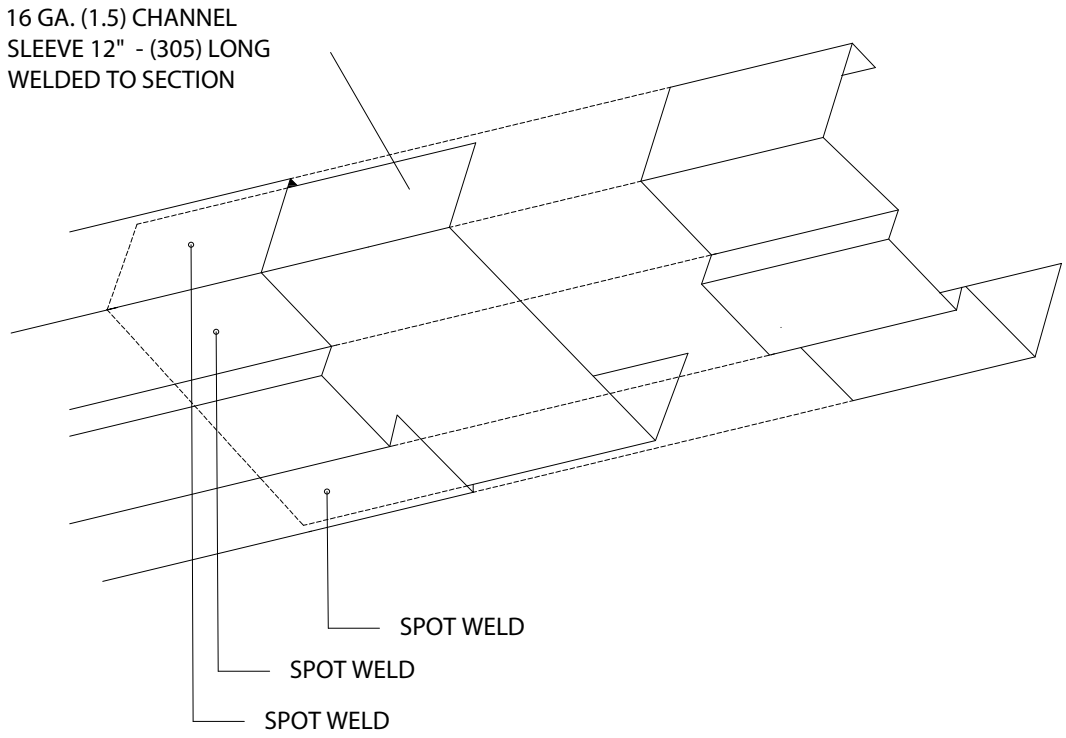

PROJECT:

LH SWING KEY RH

NOTES:
ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16" (± 2) TOLERANCE.

DIMENSIONS SHOWN IN ( ) ARE IN MM.

DIAMOND MANUFACTURING

TITLE

PERIMETER SPLICE DETAIL

REV | DRAWING NO.

DRAWN BY: A.I. | DATE: 04/19/2021 | SCALE: NTS

EXAMPLE # 1
AS. 5-3/4"

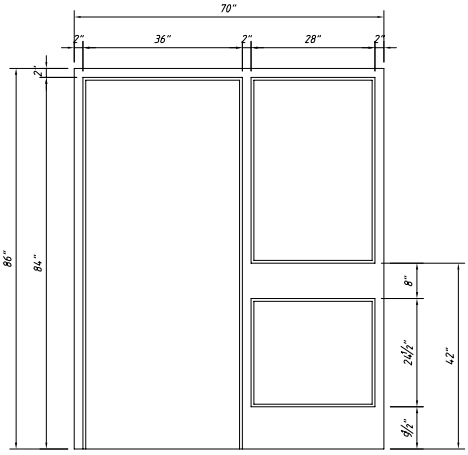

Step #1	- OPEN SECTION	7' + 7' + 6'	=	20'	@	$	7.00	=	$	140.00
	- CLOSED SECTION	7'	=	7'	@		17.00	=	$	119.00
	- RAIL SECTION	3'	=	3'	@		31.00	=	$	93.00
	- SILL SECTION	3'	=	3'	@		23.50	=	$	70.50
Step #2	- STANDARD JOINT WELDS		=	3'	@		40.00	=	$	120.00
	- RAIL JOINT WELDS		=	2'	@		80.00	=	$	160.00
	- SILL JOINT WELDS		=	2'	@		80.00	=	$	160.00
Step #3	- CONCEALED OHS PREP		=	1'	@		80.00	=	$	80.00
	SCREEN LABEL 90 MIN MAX		=	1'	@		40.00	=	$	40.00
									$	982.50 LIST

EXAMPLE # 2
AS. 6-3/4"

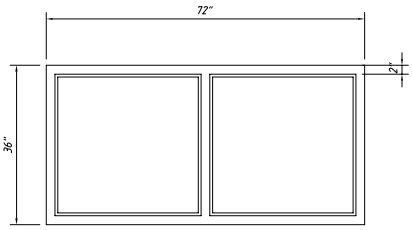

Step #1	- OPEN SECTION	6' + 3' + 6' + 3'	=	18'	@	$	8.50	=	$	153.00
	- CLOSED SECTION	3'	=	3'	@		19.00	=	$	57.00
Step #2	- STANDARD JOINT WELDS		=	6'	@		40.00	=	$	240.00
Step #3	WINDOW LABEL 90 MIN MAX		=	1'	@		40.00	=	$	40.00
										490.00 LIST

PROJECT:

LH SWING KEY RH

NOTES:
ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16" (± 2) TOLERANCE.

DIMENSIONS SHOWN IN ( ) ARE IN MM.

DIAMOND MANUFACTURING

TITLE
ESTIMATING FOR FACTORY ASSEMBLED SCREENS

REV | DRAWING NO.

DRAWN BY: A.I. | DATE: 04/19/2021 | SCALE: NTS

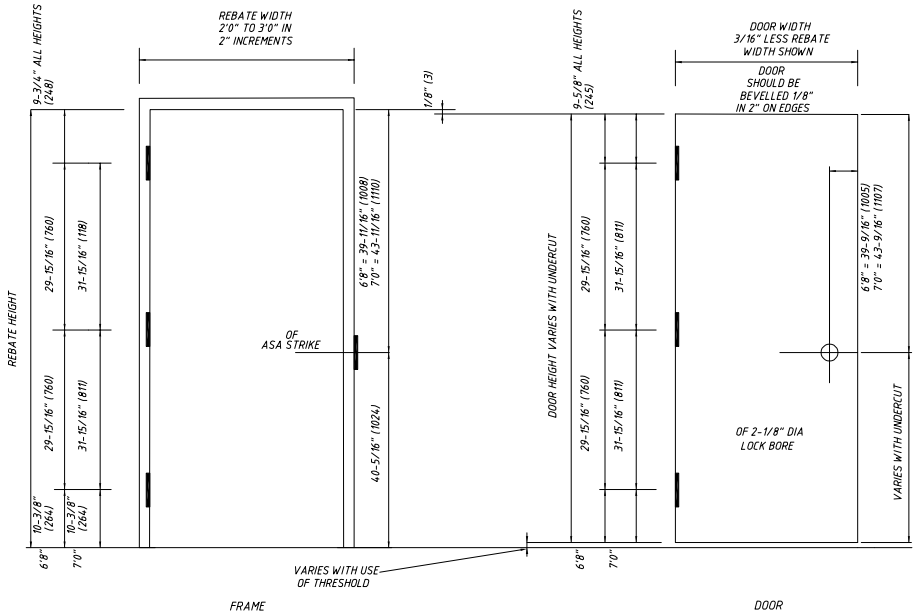

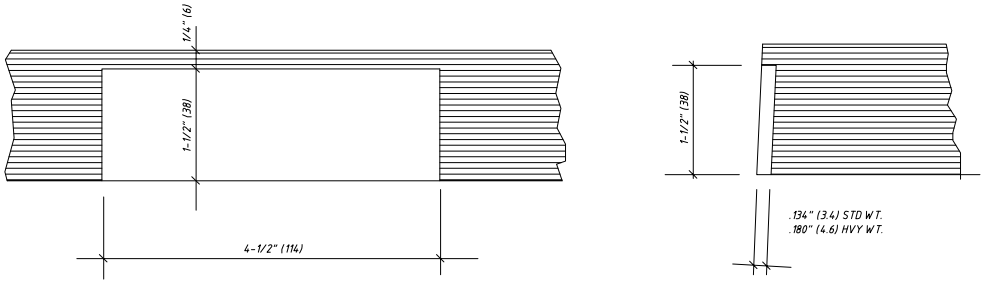

DOOR HINGE CUT-OUT PREPARATION

"K" SERIES WOOD DOOR MACHINING DETAILS
USING 1-3/4" (45mm) HOLLOW OR SOLID CORE WOOD DOORS

PROJECT:

LH SWING KEY RH

NOTES:
ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16" (± 2) TOLERANCE.

DIMENSIONS SHOWN IN ( ) ARE IN MM.

DIAMOND MANUFACTURING

TITLE

"K" SERIES WOOD DOOR MACHINING DETAILS

REV | DRAWING NO.

DRAWN BY: A.I. | DATE: 04/19/2021 | SCALE: NTS

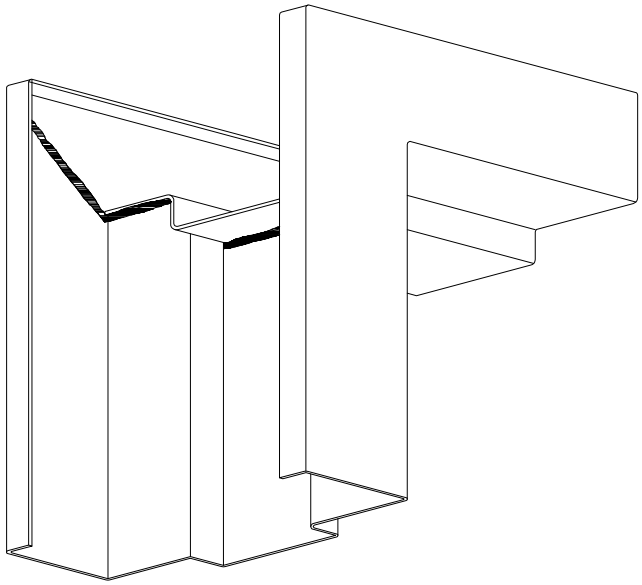

Soffit width continuously welded inside throat.

PROJECT:

LH SWING KEY RH

NOTES:
ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16"
(± 2) TOLERANCE.

DIMENSIONS SHOWN IN ( ) ARE IN MM.

DIAMOND MANUFACTURING

TITLE

FULL PROFILE WELD (CONTINUOUS)

REV		DRAWING NO.	
DRAWN BY: A.I.	DATE: 04/19/2021	SCALE: NTS	

2021-2022 PRICE LIST

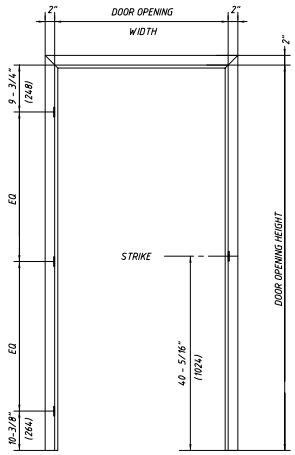

ELEV. #_____
FOR 1-3/4" SINGLE DOOR

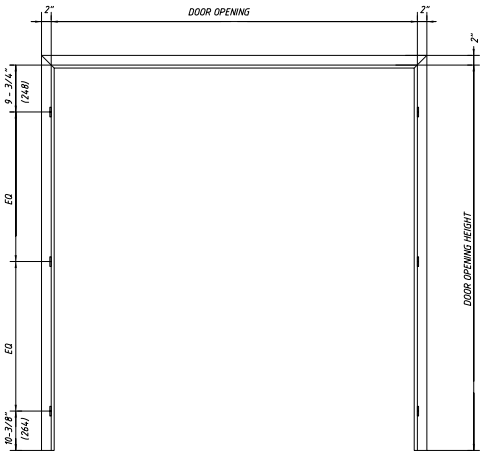

ELEV. #_____
FOR 1-3/4" DOUBLE DOOR

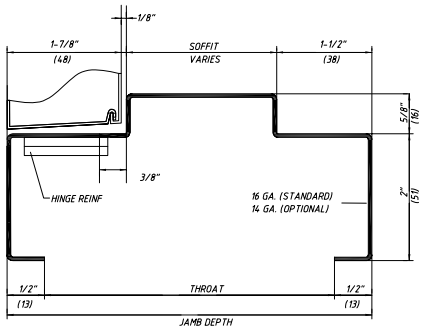

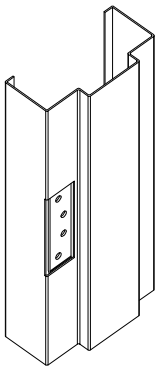

4-1/2" (114) UNIVERSAL HINGE PREPARATION
7Ga. (4.1) REINFORCEMENT WITH DUST BOX
FOR STANDARD OR HEAVY WEIGHT HINGES
D & T FOR #12-24 SCREW

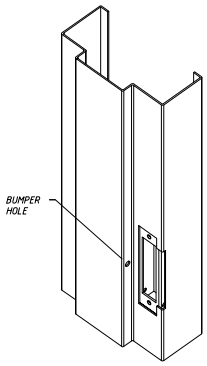

4-7/8" (124) UNIVERSAL HINGE PREPARATION (ANSI A155.1)
14Ga. (2.0) REINFORCEMENT WITH DUST BOX
D & T FOR #12-24 SCREW

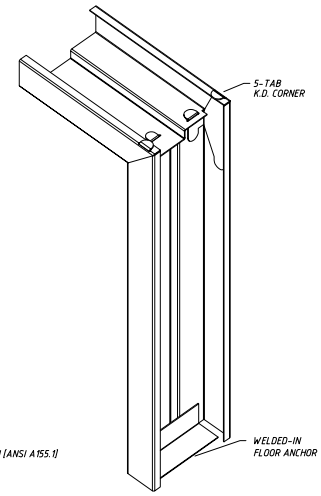

	MODEL	JAMB DEPTH	AS 16	AS 14 (ENG. ONLY)
			THROAT	THROAT
STD.	AS 475	4-3/4" (121)	3-3/4" (95)	3-3/4" (95)
	AS 575	5-3/4" (146)	4-7/8" (95)	4-7/8" (124)
	AS 675	6-3/4" (172)	5-3/4" (146)	5-3/4" (146)
	AS 775	7-3/4" (197)	6-3/4" (171)	6-3/4" (171)
	AS 825	8-1/4"" (210)	7-1/4" (184)	7-1/4" (184)
	AS 875	8-3/4"(222)	7-3/4" (184)	7-3/4" (184)
ENG.	MINIMUM	4-1/2" (114)	3-1/2" (89)	3-1/2" (89)
	MAXIMUM	12-1/4" (311)	11-1/4" (286)	11-1/4" (286)

Notes:

1): AS 5 3/4" FRAMES WILL HAVE 7/16" SINGLE

2): ALL OTHER FRAMES WILL HAVE 1/2" SINGLE RETURN

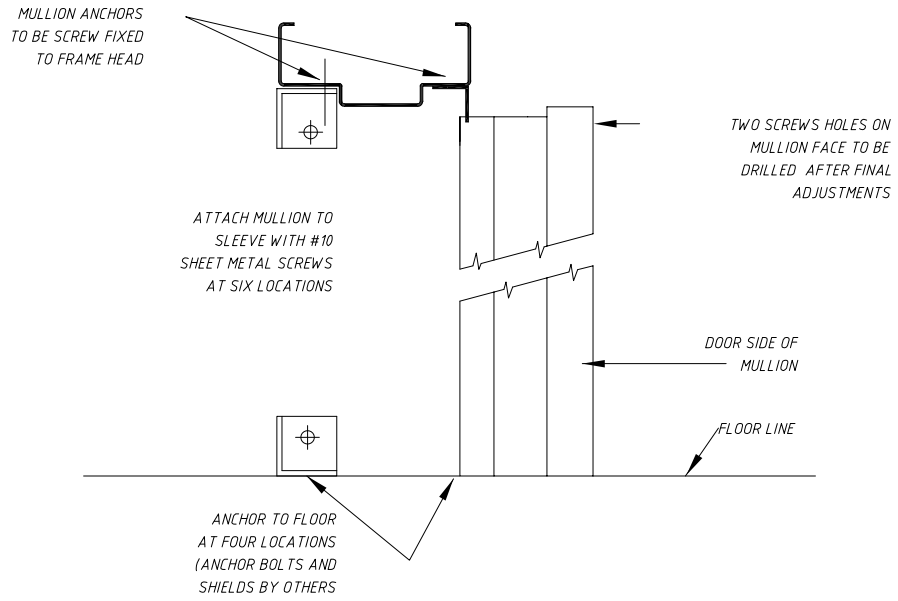

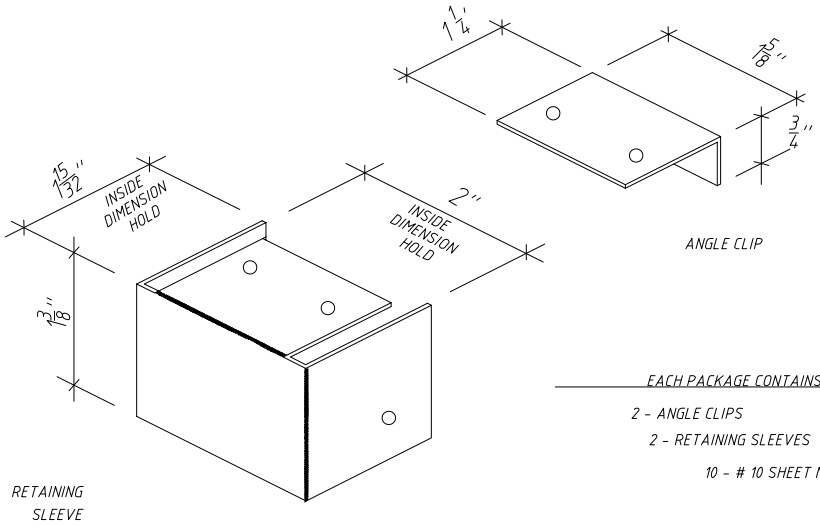

EACH PACKAGE CONTAINS:

2 - ANGLE CLIPS
2 - RETAINING SLEEVES
10 - # 10 SHEET METAL SCREWS

PROJECT:

LH SWING KEY RH

NOTES:
ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16" (± 2) TOLERANCE.

DIMENSIONS SHOWN IN ( ) ARE IN MM.

DIAMOND MANUFACTURING

TITLE
REMOVABLE MULLION INSTALLATION KIT

REV | DRAWING NO.

DRAWN BY: A.I. | DATE: 04/19/2021 | SCALE: NTS

TWO WAY CORNER POST

Corner posts are used to create an angle in an elevation frame.
Gauges 14 & 16, and lengths up to 10 feet

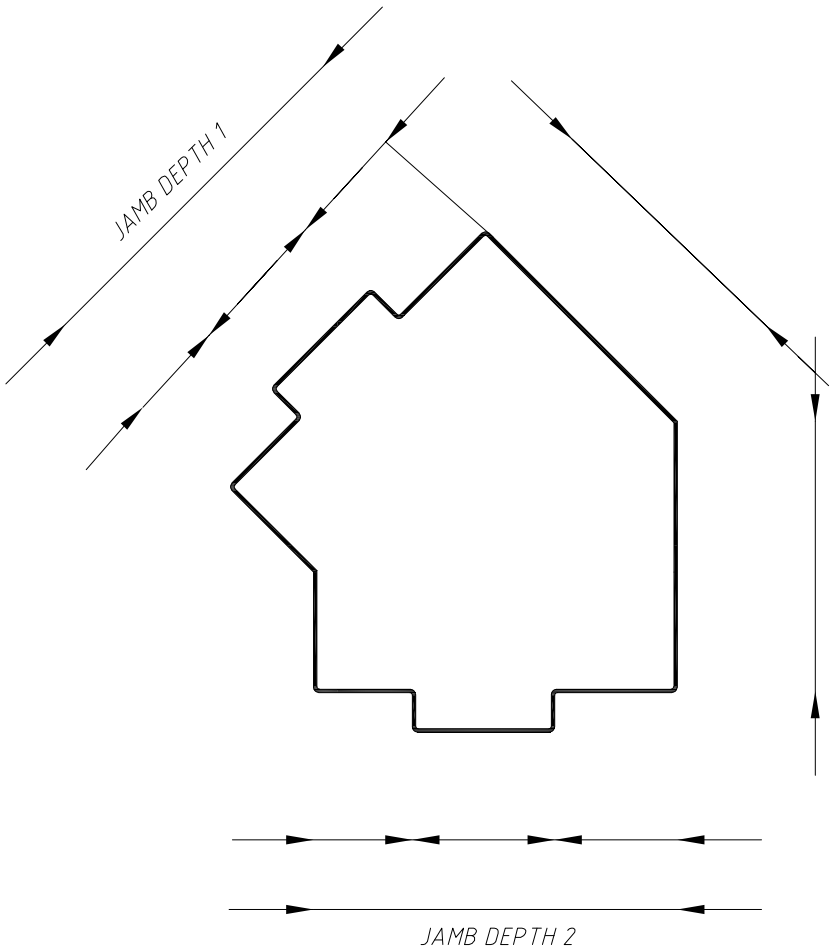

PROJECT:

LH SWING KEY RH

NOTES:
ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16" (± 2) TOLERANCE.

DIMENSIONS SHOWN IN ( ) ARE IN MM.

DIAMOND MANUFACTURING

TITLE
TWO WAY CORNER POST

REV | DRAWING NO.

DRAWN BY: A.I. | DATE: 04/19/2021 | SCALE: NTS

THREE WAY CORNER POST

Corner posts are used to create an angle in an elevation frame.
Gauges 14 & 16, and lengths up to 10 feet

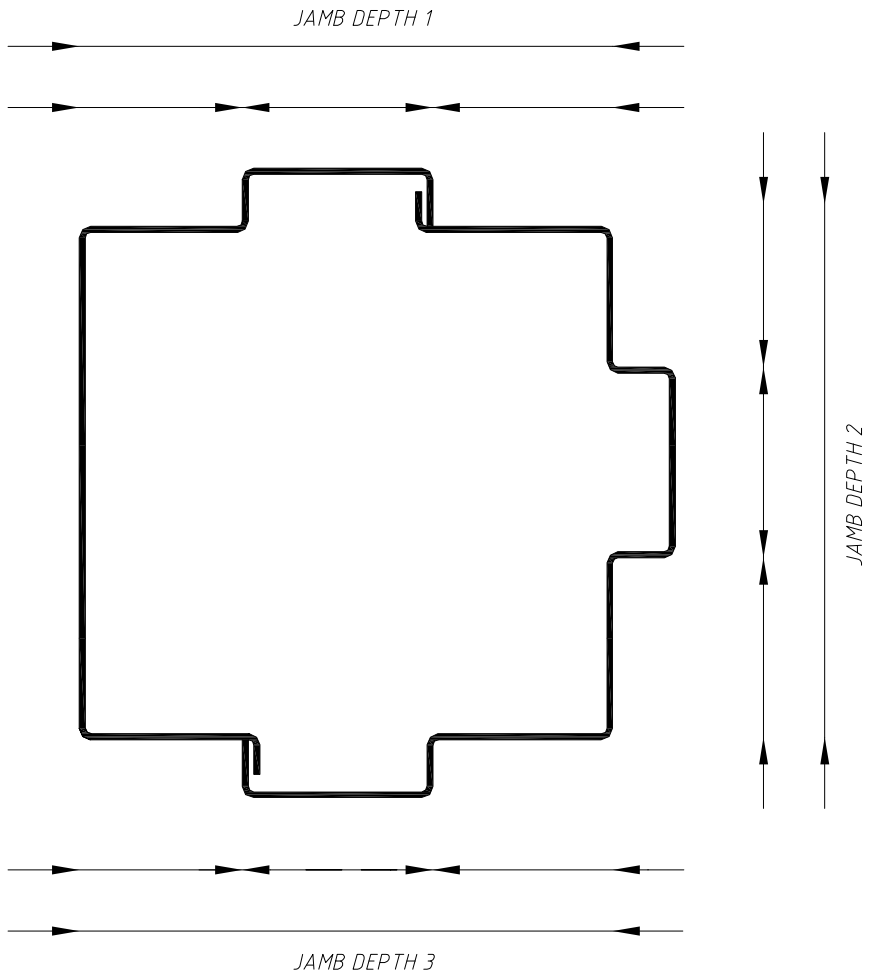

PROJECT:

LH SWING KEY RH

NOTES:
ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16" (± 2) TOLERANCE.

DIMENSIONS SHOWN IN ( ) ARE IN MM.

DIAMOND MANUFACTURING

TITLE
THREE WAY CORNER POST

REV | DRAWING NO.

DRAWN BY: A.I. | DATE: 04/19/2021 | SCALE: NTS

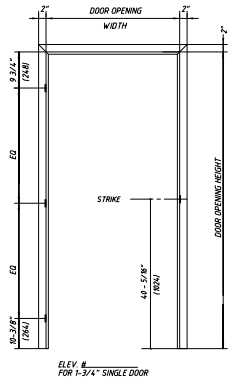

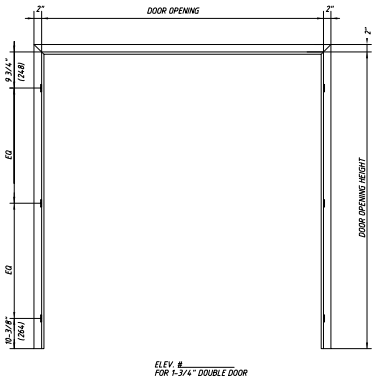

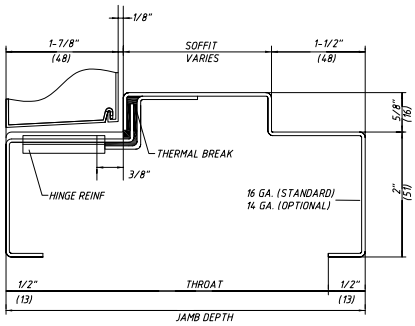

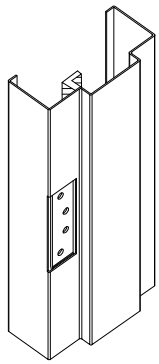

4-1/2" (114) UNIVERSAL HINGE PREPARATION
7Ga. (4.1) REINFORCEMENT WITH DUST BOX
FOR STANDARD OR HEAVY WEIGHT HINGES
D & T FOR #12-24 SCREW

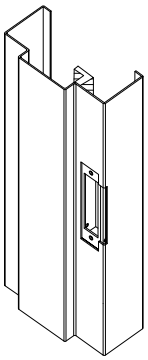

4-7/8" (124) UNIVERSAL HINGE PREPARATION (ANSI A155.1)
14Ga. (2.0) REINFORCEMENT WITH DUST BOX
D & T FOR #12-24 SCREW

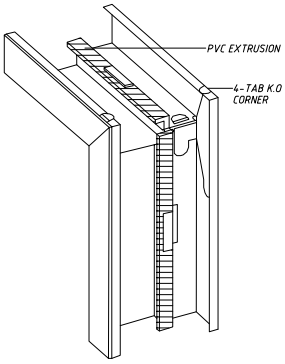

TYPICAL CORNER SECTION

	MODEL		AS 16	AS 14 (ENG. ONLY)
			THROAT	THROAT
STD.	AS 575	5-3/4" (146)	4-7/8" (124)	4-7/8" (124)
STD.	AS 675	6-3/4" (172)	5-3/4" (146)	5-3/4" (146)
STD.	AS 875	8-3/4" (222)	7-3/4" (197)	7-3/4" (197)
ENG.	MINIMUM	5-3/4" (146)	4-7/8" (124)	4-7/8" (124)
ENG.	MAXIMUM	12-1/4" (311)	11-1/4" (286)	11-1/4" (286)

× As 5 3/4" HAS 7/16" RETURNS

Notes:

1): AS 5 3/4" FRAMES WILL HAVE 7/16" SINGLE

2): ALL OTHER FRAMES WILL HAVE 1/2" SINGLE RETURN

PROJECT:

LH SWING KEY RH

NOTES:
ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16" (± 2) TOLERANCE.

DIMENSIONS SHOWN IN ( ) ARE IN MM.

DIAMOND MANUFACTURING

TITLE

"AS" SERIES THERMAL BREAK FRAMES

REV | DRAWING NO.

DRAWN BY: A.I. | DATE: 04/19/2021 | SCALE: NTS

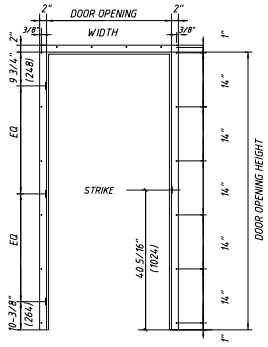

ELEV. #_____
FOR 1-3/4" SINGLE DOOR

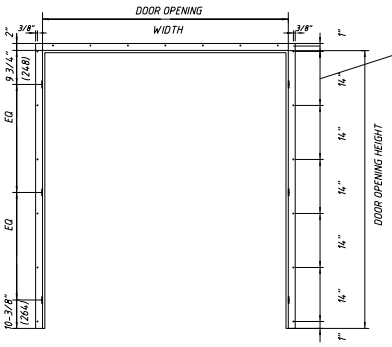

ELEV. #_____
FOR 1-3/4" DOUBLE DOOR

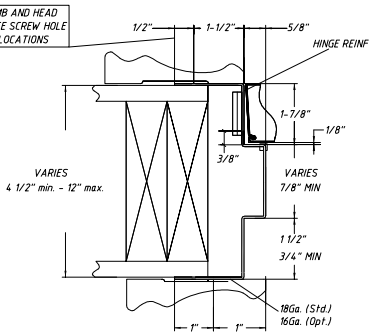

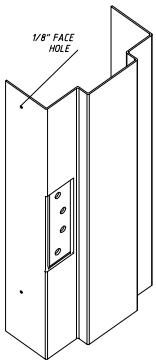

4-1/2" (114) UNIVERSAL HINGE PREPARATION
10 Ga. (4.1) REINFORCEMENT WITH DUST BOX
FOR STANDARD AND HEAVY WEIGHT HINGES
D & T FOR #12-24 SCREW

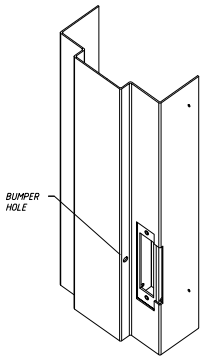

4-7/8" (124) UNIVERSAL HINGE PREPARATION (ANSI A155.1)
14Ga. (2.0) REINFORCEMENT WITH DUST BOX
D & T FOR #12-24 SCREW

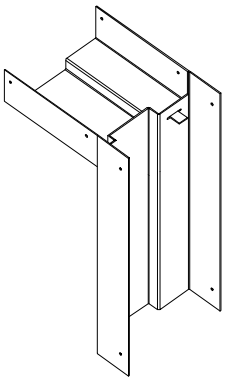

2 - TAB KD CORNER
FOR 3 PC INSTALLATION

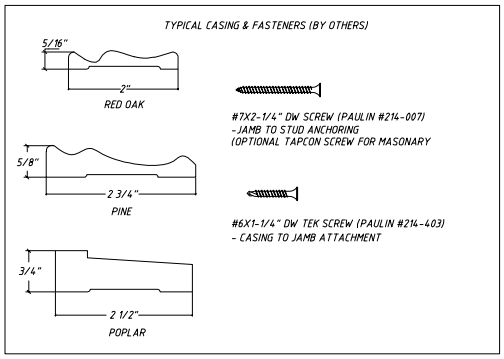

PROJECT:

LH SWING KEY RH

NOTES:
ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16"
(± 2) TOLERANCE.

DIMENSIONS SHOWN IN ( ) ARE IN MM.

DIAMOND MANUFACTURING

TITLE

"CBO" FIRE DOOR FRAME BASIC DETAIL
(NO TENSION ANCHOR)

REV		DRAWING NO.	
DRAWN BY: A.I.	DATE: 04/19/2021	SCALE: NTS	

2021-2022 PRICE LIST

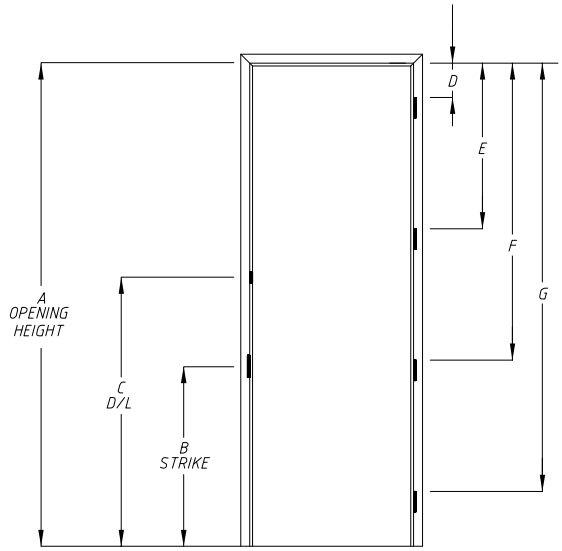

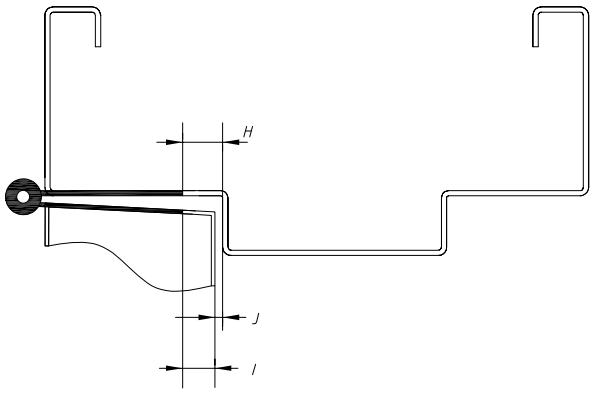

	A	B	C	D	E	F	G	H	I	J
4-1/2" HIGH HINGE	6'8"	$40\frac{5}{16}$"	48"	$7\frac{1}{2}$"	$37\frac{7}{16}$"	$67\frac{3}{8}$"		$\frac{3}{8}$"	$\frac{1}{4}$"	$\frac{1}{8}$"
	6'10"				$38\frac{7}{16}$"	$69\frac{3}{8}$"				
	7'0"				$39\frac{7}{16}$"	$71\frac{3}{8}$"				
	7'2"				$40\frac{7}{16}$"	$73\frac{3}{8}$"				
	7'4"				$41\frac{7}{16}$"	$75\frac{3}{8}$"				
	7'6"				$42\frac{7}{16}$"	$77\frac{3}{8}$"				
	7'6"				$30\frac{51}{64}$"	$54\frac{3}{32}$"	$77\frac{25}{64}$"			
	7'8"				$31\frac{29}{64}$"	$55\frac{13}{32}$"	$79\frac{23}{64}$"			
	7'10"				$32\frac{1}{8}$"	$56\frac{3}{4}$"	$81\frac{3}{8}$"			
	8'0"				$32\frac{51}{64}$"	$58\frac{3}{32}$"	$83\frac{25}{64}$"			
5" HIGH HINGE	6'8"	$40\frac{5}{16}$"	48"	$7\frac{1}{2}$"	$37\frac{3}{16}$"	$67\frac{1}{8}$"		$\frac{3}{8}$"	$\frac{1}{4}$"	$\frac{1}{8}$"
	6'10"				$38\frac{3}{16}$"	$69\frac{1}{8}$"				
	7'0"				$39\frac{3}{16}$"	$71\frac{1}{8}$"				
	7'2"				$40\frac{3}{16}$"	$73\frac{1}{8}$"				
	7'4"				$41\frac{3}{16}$"	$75\frac{1}{8}$"				
	7'6"				$42\frac{3}{16}$"	$77\frac{1}{8}$"				
	7'6"				$30\frac{35}{64}$"	$53\frac{27}{32}$"	$77\frac{9}{64}$"			
	7'8"				$31\frac{13}{64}$"	$55\frac{5}{32}$"	$79\frac{7}{64}$"			
	7'10"				$31\frac{7}{8}$"	$56\frac{27}{32}$"	$81\frac{9}{64}$"			
					$32\frac{35}{64}$"	$57\frac{27}{32}$"	$83\frac{9}{64}$"			

NOTES:
ALL DIMENSIONS ARE SUBJECT TO INDUSTRY STANDARD TOLERANCES,
TOLERANCES BETWEEN HINGES ARE NON-ACCUMULATIVE.
DIMENSIONS D, E, F AND G ARE SHOWN FROM
TOP OF FRAME REBATE TO TOP OF EACH HINGE
DIMENSIONS B, C ARE SHOWN FROM THE BOTTOM OF JAMB
TO CENTER LINE OF THE PREPERATION.
DIMENSION C OPTION: 46 5/16"

PROJECT:

LH SWING KEY RH

NOTES:
ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16"
(± 2) TOLERANCE.

DIMENSIONS SHOWN IN ( ) ARE IN MM.

DIAMOND MANUFACTURING

TITLE
STANDARD HARDWARE LOCATIONS (FRAME)

REV DRAWING NO.

DRAWN BY: A.I. DATE: 04/19/2021 SCALE: NTS

2021-2022 PRICE LIST

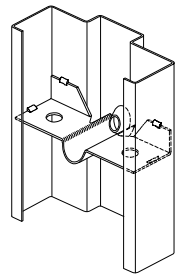

EXISTING MASONARY ANCHOR (EMA)

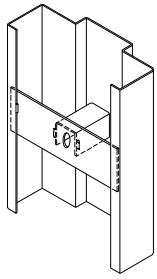

WELD IN TUBE AND STRAP ANCHOR

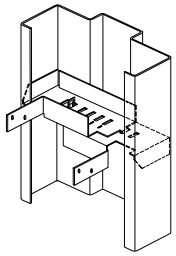

COMBINATION STUD ANCHOR

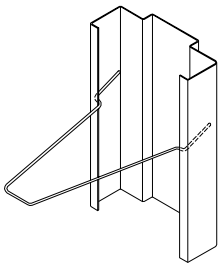

WIRE ANCHOR

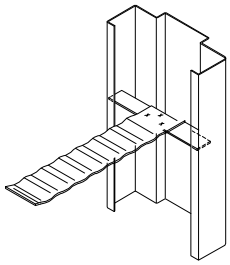

MASONARY T ANCHOR

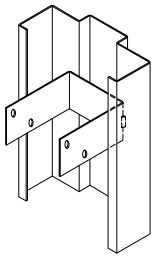

STRAP ANCHOR

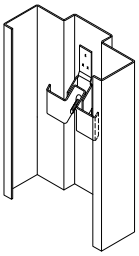

TENSION ANCHOR

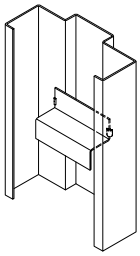

Z - ANCHOR



CUSTOM STEEL STUD ANCHOR
WITH FLUSH RETURNS

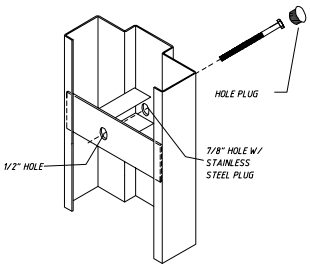

PLUG AND STRAP ANCHOR

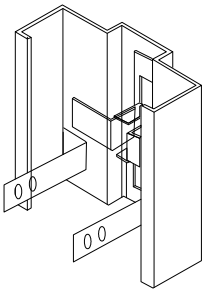

TENSION AND STRAP

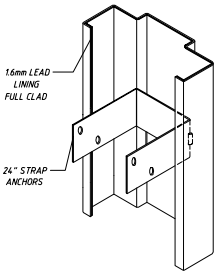

24" STRAP

PROJECT:

LH SWING KEY RH

NOTES:
ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16"
(± 2) TOLERANCE.

DIMENSIONS SHOWN IN ( ) ARE IN MM.

DIAMOND MANUFACTURING

TITLE
ANCHOR TYPES

REV | DRAWING NO.

DRAWN BY: A.I. | DATE: 04/19/2021 | SCALE: NTS

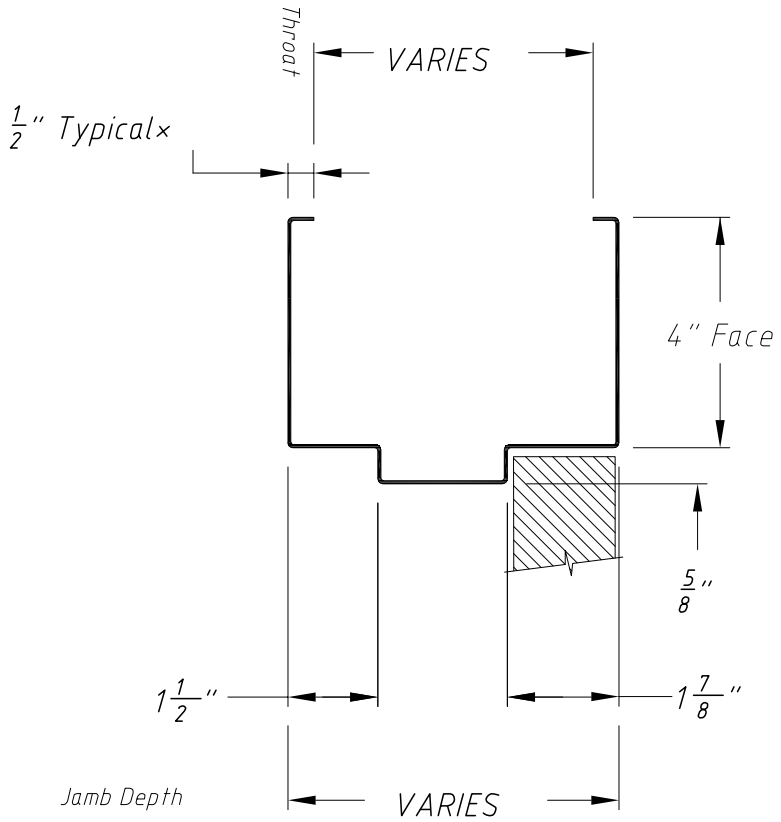

Notes:
Material: 16 to 18 gauge steel is typical
×7/16" Return Typical for 5-3/4" Jamb Depth

PROJECT:

LH SWING KEY RH

NOTES:
ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16" (± 2) TOLERANCE.

DIMENSIONS SHOWN IN ( ) ARE IN MM.

DIAMOND MANUFACTURING

TITLE
DOUBLE RABBET WITH 4" FACE
(HEAD DETAIL - OPTIONAL)

REV | DRAWING NO.

DRAWN BY: A.I. | DATE: 04/19/2021 | SCALE: NTS

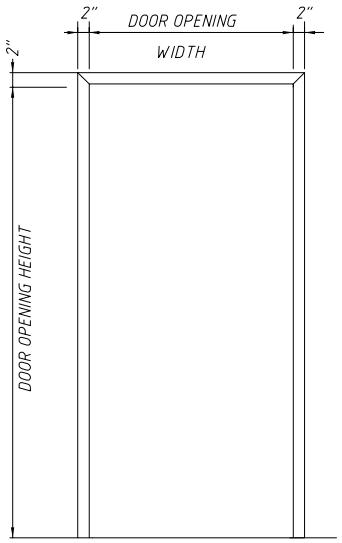

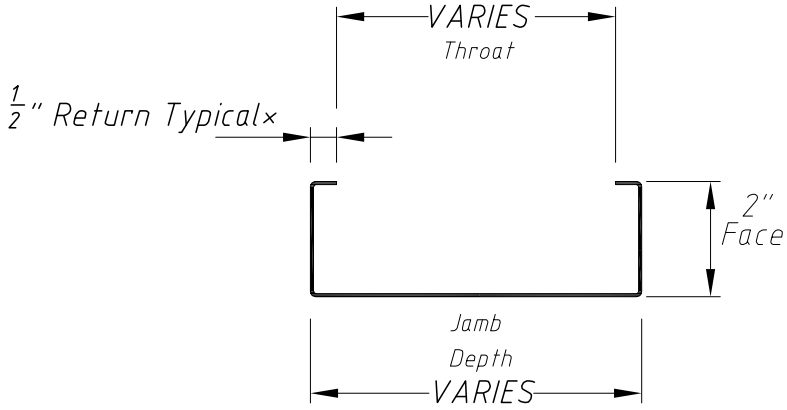

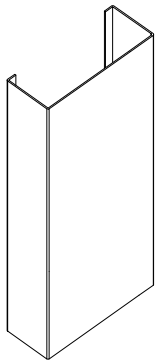

4-1/2" (114) UNIVERSAL HINGE PREPARATION
7Ga. (4.1) REINFORCEMENT WITH DUST BOX
FOR STANDARD OR HEAVY WEIGHT HINGES
D & T FOR #12-24 SCREW

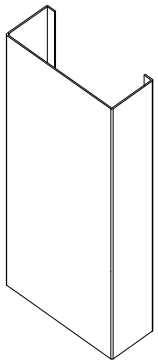

4-7/8" (124)
14Ga. (2.0) REINFORCEMENT WITH DUST BOX
D & T FOR #12-24 SCREW

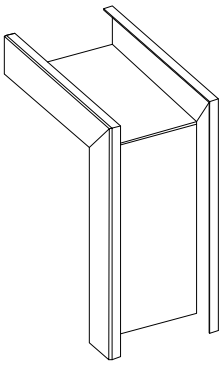

TYPICAL CASED OPEN CORNER SECTION

Notes:

Material: 14 to 16 gauge steel is typical

PROJECT:

LH SWING KEY RH

NOTES:
ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16"
(± 2) TOLERANCE.

DIMENSIONS SHOWN IN ( ) ARE IN MM.

DIAMOND MANUFACTURING

TITLE

CASED OPEN

REV		DRAWING NO.	
DRAWN BY: A.I.	DATE: 04/19/2021	SCALE: NTS	

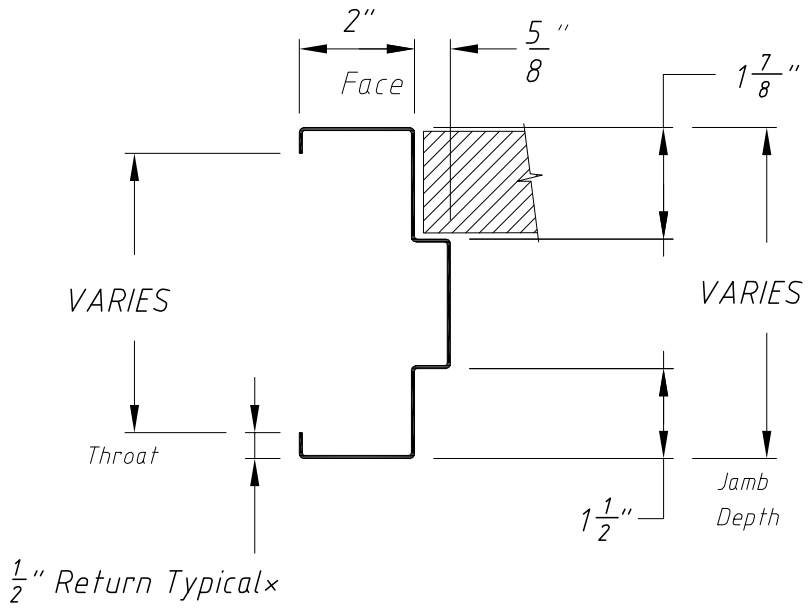

Notes:
Material: 14 & 16 gauge steel is typical
×7/16" Return Typical for 5-3/4" Jamb Depth

PROJECT:

LH SWING KEY RH

NOTES:
ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16" (± 2) TOLERANCE.

DIMENSIONS SHOWN IN ( ) ARE IN MM.

DIAMOND MANUFACTURING

TITLE
DOUBLE RABBET (HEAD OR JAMB DETAIL)

REV | DRAWING NO.

DRAWN BY: A.I. | DATE: 04/19/2021 | SCALE: NTS

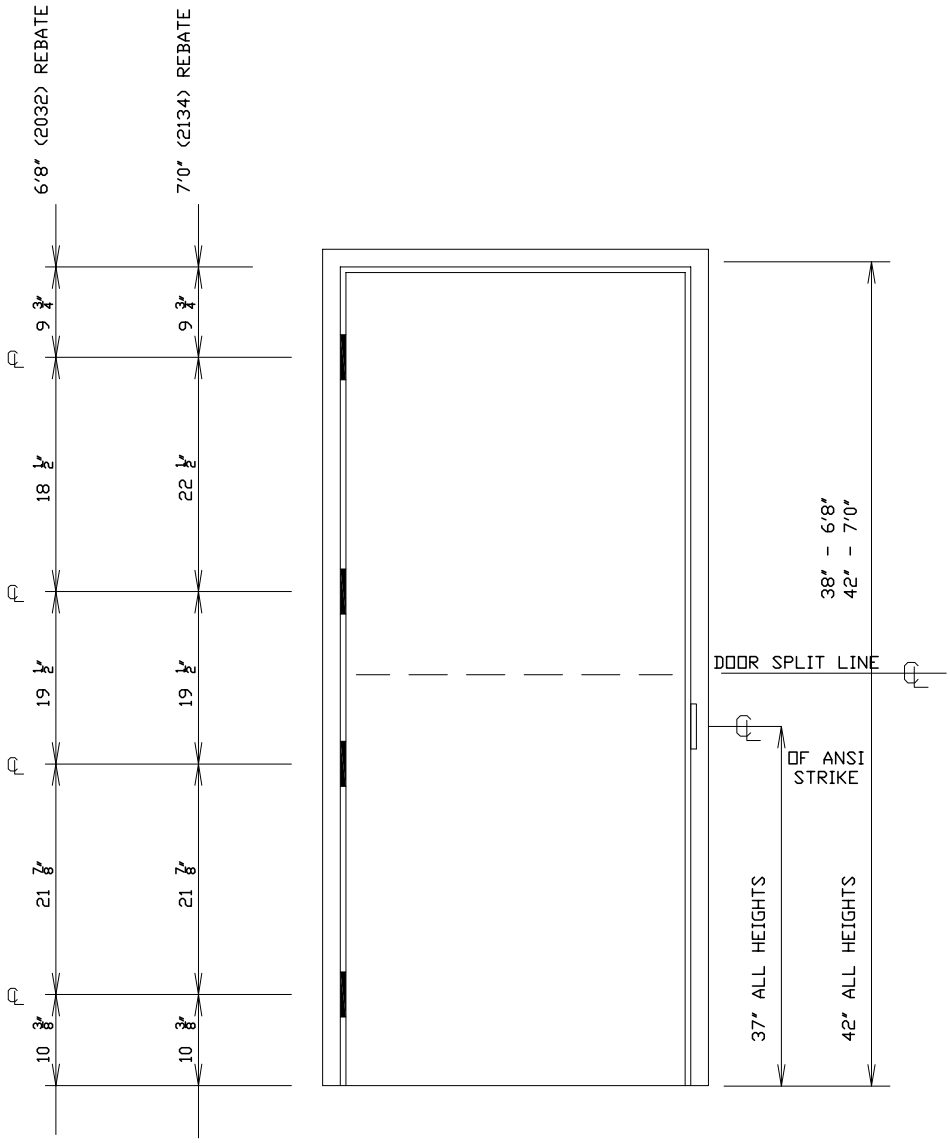

*ADJUST THESE DIMENSIONS ONLY FOR HEIGHTS OTHER THAN 6'8" OR 7'0".
ALL OTHERS REMAIN AS SHOWN

PROJECT:

LH SWING KEY RH

NOTES:
ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16" (± 2) TOLERANCE.

DIMENSIONS SHOWN IN ( ) ARE IN MM.

DIAMOND MANUFACTURING

TITLE
DUTCH DOOR FRAME

REV | DRAWING NO.

DRAWN BY: A.I. | DATE: 04/19/2021 | SCALE: NTS

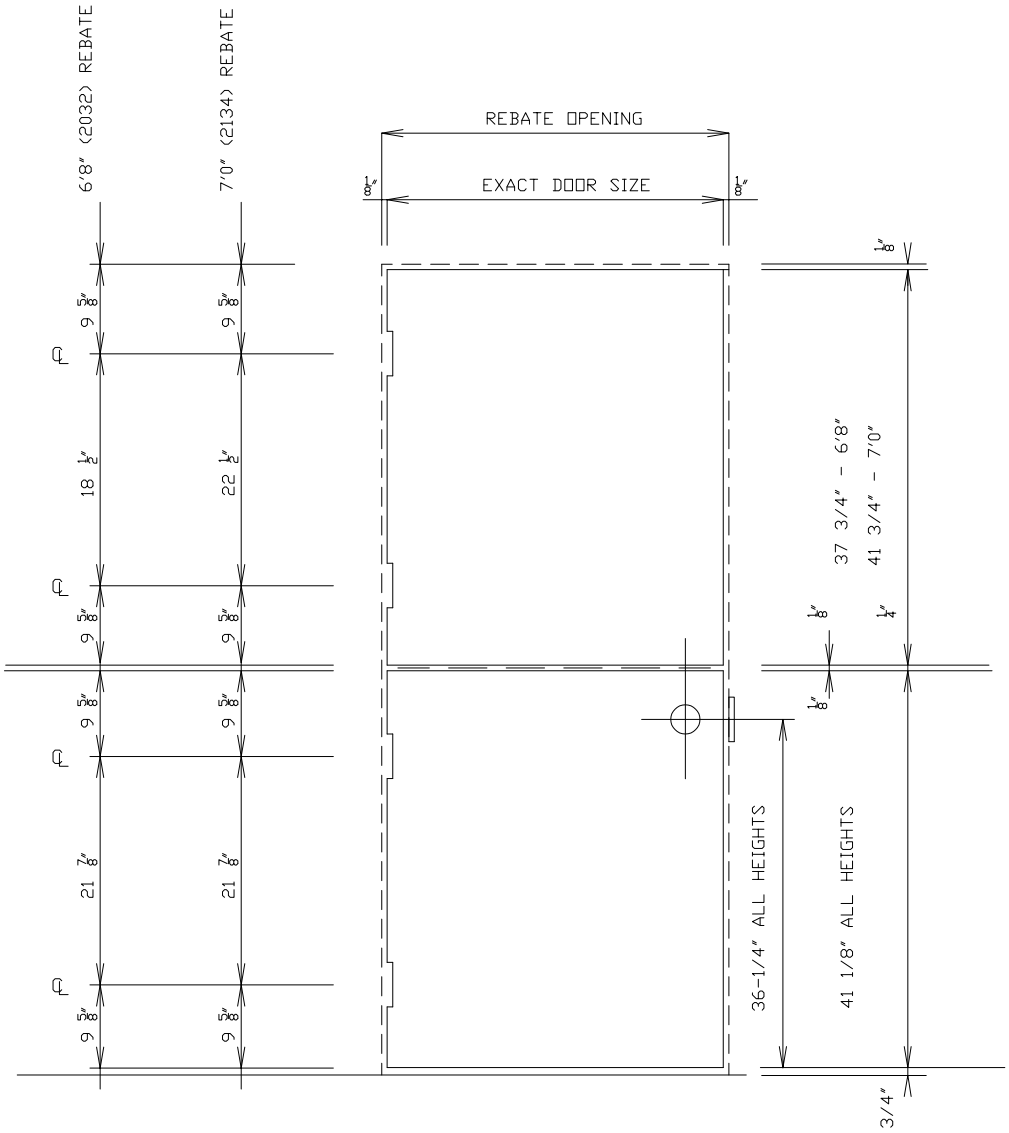

*ADJUST THESE DIMENSIONS ONLY FOR HEIGHTS OTHER THAN 6'8" OR 7'0".
ALL OTHERS REMAIN AS SHOWN

PROJECT:

LH SWING KEY RH

NOTES:
ALL DIMENSIONS GIVEN ARE SUBJECT TO + OR - 1 1/16" (± 2) TOLERANCE.

DIMENSIONS SHOWN IN ( ) ARE IN MM.

DIAMOND MANUFACTURING

TITLE
DUTCH DOOR

REV | DRAWING NO.

DRAWN BY: A.I. | DATE: 04/19/2021 | SCALE: NTS

DIAMOND

D I A M O N D M F G . C A

DIAMOND
MANUFACTURING

905.604.4212
Orderdesk@diamondmfg.ca
www.diamondmfg.ca
Esna Park Drive, Unit 17
Markham, ON L3R 1H3